






Dynemech DLM series mounts, developed in steel and stainless steel respectively are simple and effective vibration dampers for machines with respective holes in the base. these mounts offer low frequency attenuation, stable machine levelling and vibration reduction. the flexible levelling screw accomodates uneven/sloped surfaces and are used in pharmaceutical, food and beverages processing and packaging units, medical equipments manufacturing and chemical processing industries.

Model	Load Capacity Kg/pc	Diameter (D) mm	Height (H) mm	Bolt Size (mm)	Possible Bolts	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (°C)	Color	Applications
DLM1-u-55-FG-M16x2.0x100-A-GR	150	55	21	M16X100	M10/12/16/20/24	0.9	18	From -16 to 90	Dark Grey/Green	Applications: Tool Room Machines, Plastic Injection Moulding Machines, Pressure Die Casting Machines, Printing and Textile Machines (For machines having high axial forces.)
DLM2-u-85-FG-M16x2.0x100-A-GR	350	85	28	M16X100	M10/12/16/20/24	0.9	18	From -16 to 90	Dark Grey/Green	
DLM3-u-112-FG-M16x2.0x150-A-GR	600	112	28	M16X150	M10/12/16/20/24	0.9	18	From -16 to 90	Dark Grey/Green	
DLM4-u-135-FG-M16x2.0x150-A-GR	900	135	30	M16X150	M10/12/16/20/24	0.9	18	From -16 to 90	Dark Grey/Green	
DLM5-u-160-FG-M16x2.0x150-A-GR	1400	160	30	M16X150	M10/12/16/20/24	0.9	18	From -16 to 90	Dark Grey/Green	
DLM6-u-185-FG-M16x2.0x150-A-GR	1900	185	34	M16X150	M10/12/16/20/24	0.9	18	From -16 to 90	Dark Grey/Green	
DLM7-u-215-FG-M16x2.0x150-A-GR	2500	215	35	M16X150	M10/12/16/20/24	0.9	18	From -16 to 90	Dark Grey/Green	
DLM8-u-249-FG-M20x2.5x150-A-GR	3500	249	44	M20X150	M10/12/16/20/24	0.9	18	From -16 to 90	Dark Grey/Green	
DLM9-u-276-FG-M20x2.5x150-A-GR	4200	276	43	M20X150	M10/12/16/20/24	0.9	18	From -16 to 90	Dark Grey/Green	
DLM1-u-10-55-FG-M16x2.0x100-A-GR	150	55	16	M16X100	M10/12/16/20/24	0.9	25	From -16 to 90	Dark Grey/Green	Applications: Tool Room Machines, Plastic Injection Moulding Machines, Pressure Die Casting Machines, Printing and Textile Machines (For machines having high axial forces.)
DLM2-u-10-85-FG-M16x2.0x100-A-GR	350	85	23	M16X100	M10/12/16/20/24	0.9	25	From -16 to 90	Dark Grey/Green	
DLM3-u-10-112-FG-M16x2.0x150-A-GR	600	112	23	M16X150	M10/12/16/20/24	0.9	25	From -16 to 90	Dark Grey/Green	
DLM4-u-10-135-FG-M16x2.0x150-A-GR	900	135	25	M16X150	M10/12/16/20/24	0.9	25	From -16 to 90	Dark Grey/Green	
DLM5-u-10-160-FG-M16x2.0x150-A-GR	1400	160	25	M16X150	M10/12/16/20/24	0.9	25	From -16 to 90	Dark Grey/Green	
DLM6-u-10-185-FG-M16x2.0x150-A-GR	1900	185	29	M16X150	M10/12/16/20/24	0.9	25	From -16 to 90	Dark Grey/Green	
DLM7-u-10-215-FG-M16x2.0x150-A-GR	2500	215	30	M16X150	M10/12/16/20/24	0.9	25	From -16 to 90	Dark Grey/Green	

DLM8-u-10-249-FG-M20x2.5x150-A-GR	3500	249	39	M20X150	M10/12/16/20/24	0.9	25	From -16 to 90	Dark Grey/Green	Applications: Tool Room Machines, Plastic Injection Moulding Machines, Pressure Die Casting Machines, Shaper, Printing and Textile Machines (For machines having high axial forces.)
DLM9-u-10-276-FG-M20x2.5x150-A-GR	4200	276	38	M20X150	M10/12/16/20/24	0.9	25	From -16 to 90	Dark Grey/Green	
DLM1-u-12-55-FG-M16x2.0x100-A-GR	150	55	18	M16X100	M10/12/16/20/24	0.9	20	From -16 to 90	Dark Grey/Green	
DLM2-u-12-85-FG-M16x2.0x100-A-GR	350	85	25	M16X100	M10/12/16/20/24	0.9	20	From -16 to 90	Dark Grey/Green	
DLM3-u-12-112-FG-M16x2.0x150-A-GR	600	112	25	M16X150	M10/12/16/20/24	0.9	20	From -16 to 90	Dark Grey/Green	
DLM4-u-12-135-FG-M16x2.0x150-A-GR	900	135	27	M16X150	M10/12/16/20/24	0.9	20	From -16 to 90	Dark Grey/Green	
DLM5-u-12-160-FG-M16x2.0x150-A-GR	1400	160	27	M16X150	M10/12/16/20/24	0.9	20	From -16 to 90	Dark Grey/Green	
DLM6-u-12-185-FG-M16x2.0x150-A-GR	1900	185	31	M16X150	M10/12/16/20/24	0.9	20	From -16 to 90	Dark Grey/Green	
DLM7-u-12-215-FG-M16x2.0x150-A-GR	2500	215	32	M16X150	M10/12/16/20/24	0.9	20	From -16 to 90	Dark Grey/Green	
DLM8-u-12-249-FG-M20x2.5x150-A-GR	3500	249	41	M20X150	M10/12/16/20/24	0.9	20	From -16 to 90	Dark Grey/Green	
DLM9-u-12-276-FG-M20x2.5x150-A-GR	4200	276	40	M20X150	M10/12/16/20/24	0.9	20	From -16 to 90	Dark Grey/Green	



DLM1



DLM3



DLM5



DLM7



DLM9



Model	Load Capacity Kg/pc	Diameter (D) mm	Height (H) mm	Bolt Size (mm)	Possible Bolts	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (°C)	Color	Applications
DLM1-m-55-FG-M16x2.0x100-A-GR	205	55	21	M16X100	M10/12/16/20/24	0.7	30	From -16 to 90	Dark Grey/Green	Applications: Lathe Machines, Milling Machines, Grinding Machines, Machining Centres, Turning Centres etc.
DLM2-m-85-FG-M16x2.0x100-A-GR	440	85	28	M16X100	M10/12/16/20/24	0.7	30	From -16 to 90	Dark Grey/Green	
DLM3-m-112-FG-M16x2.0x150-A-GR	790	112	28	M16X150	M10/12/16/20/24	0.7	30	From -16 to 90	Dark Grey/Green	
DLM4-m-135-FG-M16x2.0x150-A-GR	1230	135	30	M16X150	M10/12/16/20/24	0.7	30	From -16 to 90	Dark Grey/Green	
DLM5-m-160-FG-M16x2.0x150-A-GR	1890	160	30	M16X150	M10/12/16/20/24	0.7	30	From -16 to 90	Dark Grey/Green	
DLM6-m-185-FG-M16x2.0x150-A-GR	2350	185	34	M16X150	M10/12/16/20/24	0.7	30	From -16 to 90	Dark Grey/Green	
DLM7-m-215-FG-M16x2.0x150-A-GR	3240	215	35	M16X150	M10/12/16/20/24	0.7	30	From -16 to 90	Dark Grey/Green	
DLM8-m-249-FG-M20x2.5x150-A-GR	3980	249	44	M20X150	M10/12/16/20/24	0.7	30	From -16 to 90	Dark Grey/Green	
DLM9-m-276-FG-M20x2.5x150-A-GR	5230	276	43	M20X150	M10/12/16/20/24	0.7	30	From -16 to 90	Dark Grey/Green	




Model	Load Capacity Kg/pc	Diameter (D) mm	Height (H) mm	Bolt Size (mm)	Possible Bolts	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (°C)	Color	Applications
DLM1-i-55-FG-M16x2.0x100-A-GR	290	55	31	M16X100	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green	Applications: For Machines with high vertical dynamic forces such as Power Presses, Punching Machines, Stamping Machines, Shearing Machines etc.
DLM2-i-85-FG-M16x2.0x100-A-GR	620	85	38	M16X100	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green	
DLM3-i-112-FG-M16x2.0x150-A-GR	1100	112	38	M16X150	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green	
DLM4-i-135-FG-M16x2.0x150-A-GR	1720	135	40	M16X150	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green	
DLM5-i-160-FG-M16x2.0x150-A-GR	2640	160	40	M16X150	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green	
DLM6-i-185-FG-M16x2.0x150-A-GR	3290	185	44	M16X150	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green	
DLM7-i-215-FG-M16x2.0x150-A-GR	4530	215	45	M16X150	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green	
DLM8-i-249-FG-M20x2.5x150-A-GR	5570	249	54	M20X150	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green	
DLM9-i-276-FG-M20x2.5x150-A-GR	7320	276	53	M20X150	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green	



Model	Load Capacity Kg/pc	Diameter (D) mm	Height (H) mm	Bolt Size (mm)	Possible Bolts	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (°C)	Color	Applications
DLM1-p1-55-FG-M16x2.0x100-A-GR	70	55	21	M16X100	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green	Applications: Tuned To Low natural frequency, suitable for passive vibration control of Measuring & Testing Machines, Grinders etc.
DLM2-p1-85-FG-M16x2.0x100-A-GR	180	85	28	M16X100	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green	
DLM3-p1-112-FG-M16x2.0x150-A-GR	300	112	28	M16X150	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green	
DLM4-p1-135-FG-M16x2.0x150-A-GR	490	135	30	M16X150	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green	
DLM5-p1-160-FG-M16x2.0x150-A-GR	760	160	30	M16X150	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green	
DLM6-p1-185-FG-M16x2.0x150-A-GR	940	185	34	M16X150	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green	
DLM7-p1-215-FG-M16x2.0x150-A-GR	1500	215	35	M16X150	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green	
DLM8-p1-249-FG-M20x2.5x150-A-GR	1590	249	44	M20X150	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green	
DLM9-p1-276-FG-M20x2.5x150-A-GR	2090	276	43	M20X150	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green	
DLM1-p2-55-FG-M16x2.0x100-A-GR	100	55	26	M16X100	M10/12/16/20/24	0.8	12	From -16 to 90	Dark Grey/Green	Applications: Suitable for passive vibration control of measuring & testing machines maintains machines stability along with vibration reduction
DLM2-p2-85-FG-M16x2.0x100-A-GR	200	85	33	M16X100	M10/12/16/20/24	0.8	12	From -16 to 90	Dark Grey/Green	
DLM3-p2-112-FG-M16x2.0x150-A-GR	400	112	33	M16X150	M10/12/16/20/24	0.8	12	From -16 to 90	Dark Grey/Green	
DLM4-p2-135-FG-M16x2.0x150-A-GR	600	135	35	M16X150	M10/12/16/20/24	0.8	12	From -16 to 90	Dark Grey/Green	
DLM5-p2-160-FG-M16x2.0x150-A-GR	700	160	35	M16X150	M10/12/16/20/24	0.8	12	From -16 to 90	Dark Grey/Green	
DLM6-p2-185-FG-M16x2.0x150-A-GR	1200	185	39	M16X150	M10/12/16/20/24	0.8	12	From -16 to 90	Dark Grey/Green	
DLM7-p2-215-FG-M16x2.0x150-A-GR	1500	215	40	M16X150	M10/12/16/20/24	0.8	12	From -16 to 90	Dark Grey/Green	
DLM8-p2-249-FG-M20x2.5x150-A-GR	2000	249	49	M20X150	M10/12/16/20/24	0.8	12	From -16 to 90	Dark Grey/Green	
DLM9-p2-276-FG-M20x2.5x150-A-GR	2500	276	48	M20X150	M10/12/16/20/24	0.8	12	From -16 to 90	Dark Grey/Green	
DLM1-p3-55-FG-M16x2.0x100-A-GR	110	55	30	M16X100	M10/12/16/20/24	0.8	15	From -16 to 90	Dark Grey/Green	Applications: Tuned To low natural frequency, suitable for both active & passive vibration isolation of metrology and production machines.
DLM2-p3-85-FG-M16x2.0x100-A-GR	270	85	37	M16X100	M10/12/16/20/24	0.8	15	From -16 to 90	Dark Grey/Green	
DLM3-p3-112-FG-M16x2.0x150-A-GR	460	112	37	M16X150	M10/12/16/20/24	0.8	15	From -16 to 90	Dark Grey/Green	
DLM4-p3-135-FG-M16x2.0x150-A-GR	740	135	39	M16X150	M10/12/16/20/24	0.8	15	From -16 to 90	Dark Grey/Green	
DLM5-p3-160-FG-M16x2.0x150-A-GR	1140	160	39	M16X150	M10/12/16/20/24	0.8	15	From -16 to 90	Dark Grey/Green	
DLM6-p3-185-FG-M16x2.0x150-A-GR	1410	185	43	M16X150	M10/12/16/20/24	0.8	15	From -16 to 90	Dark Grey/Green	
DLM7-p3-215-FG-M16x2.0x150-A-GR	1950	215	44	M16X150	M10/12/16/20/24	0.8	15	From -16 to 90	Dark Grey/Green	
DLM8-p3-249-FG-M20x2.5x150-A-GR	2390	249	53	M20X150	M10/12/16/20/24	0.8	15	From -16 to 90	Dark Grey/Green	
DLM9-p3-276-FG-M20x2.5x150-A-GR	3140	276	52	M20X150	M10/12/16/20/24	0.8	15	From -16 to 90	Dark Grey/Green	

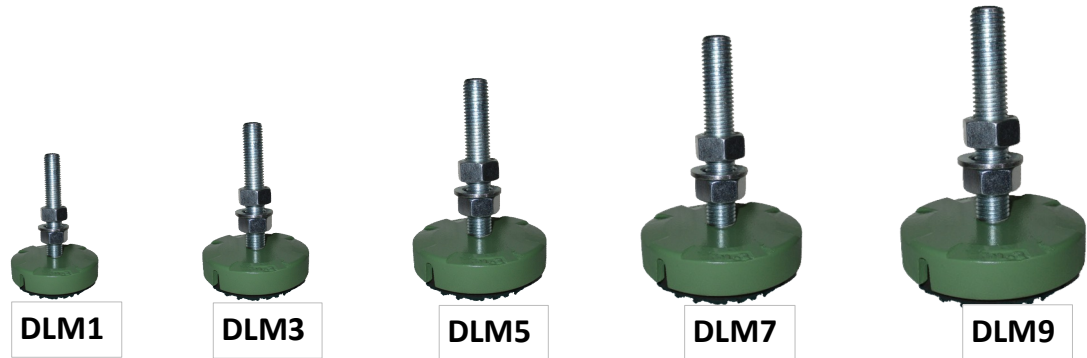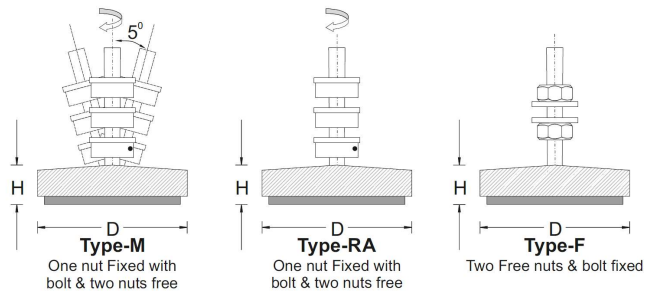

Model	Load Capacity Kg/pc	Diameter (D) mm	Height (H) mm	Bolt Size (mm)	Possible Bolts	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (°C)	Color	Applications
DLM1-s1-55-FG-M16x2.0x100-A-GR	110	55	26	M16X100	M10/12/16/20/24	0.8	15	From -16 to 90	Dark Grey/Green	Applications: Light Weight Presses, Tool Room Machines, Compressors etc. on Ground Floor as well as upper Floors.
DLM2-s1-85-FG-M16x2.0x100-A-GR	220	85	33	M16X100	M10/12/16/20/24	0.8	15	From -16 to 90	Dark Grey/Green	
DLM3-s1-112-FG-M16x2.0x150-A-GR	380	112	33	M16X150	M10/12/16/20/24	0.8	15	From -16 to 90	Dark Grey/Green	
DLM4-s1-135-FG-M16x2.0x150-A-GR	620	135	35	M16X150	M10/12/16/20/24	0.8	15	From -16 to 90	Dark Grey/Green	
DLM5-s1-160-FG-M16x2.0x150-A-GR	950	160	35	M16X150	M10/12/16/20/24	0.8	15	From -16 to 90	Dark Grey/Green	
DLM6-s1-185-FG-M16x2.0x150-A-GR	1180	185	39	M16X150	M10/12/16/20/24	0.8	15	From -16 to 90	Dark Grey/Green	
DLM7-s1-215-FG-M16x2.0x150-A-GR	1620	215	40	M16X150	M10/12/16/20/24	0.8	15	From -16 to 90	Dark Grey/Green	
DLM8-s1-249-FG-M20x2.5x150-A-GR	2250	249	49	M20X150	M10/12/16/20/24	0.8	15	From -16 to 90	Dark Grey/Green	
DLM9-s1-276-FG-M20x2.5x150-A-GR	2620	276	48	M20X150	M10/12/16/20/24	0.8	15	From -16 to 90	Dark Grey/Green	
DLM1-s2-55-FG-M16x2.0x100-A-GR	125	55	31	M16X100	M10/12/16/20/24	0.8	12	From -16 to 90	Dark Grey/Green	Applications: High Vibration Insulation for both active and passive range, Medium Presses, Stamping Macines, also well suited for high speed rotating machines on upper floors .
DLM2-s2-85-FG-M16x2.0x100-A-GR	300	85	38	M16X100	M10/12/16/20/24	0.8	8	From -16 to 90	Dark Grey/Green	
DLM3-s2-112-FG-M16x2.0x150-A-GR	550	112	38	M16X150	M10/12/16/20/24	0.8	8	From -16 to 90	Dark Grey/Green	
DLM4-s2-135-FG-M16x2.0x150-A-GR	850	135	40	M16X150	M10/12/16/20/24	0.8	8	From -16 to 90	Dark Grey/Green	
DLM5-s2-160-FG-M16x2.0x150-A-GR	1250	160	40	M16X150	M10/12/16/20/24	0.8	8	From -16 to 90	Dark Grey/Green	
DLM6-s2-185-FG-M16x2.0x150-A-GR	1700	185	44	M16X150	M10/12/16/20/24	0.8	8	From -16 to 90	Dark Grey/Green	
DLM7-s2-215-FG-M16x2.0x150-A-GR	2200	215	45	M16X150	M10/12/16/20/24	0.8	8	From -16 to 90	Dark Grey/Green	
DLM8-s2-249-FG-M20x2.5x150-A-GR	2800	249	54	M20X150	M10/12/16/20/24	0.8	8	From -16 to 90	Dark Grey/Green	
DLM9-s2-276-FG-M20x2.5x150-A-GR	3500	276	53	M20X150	M10/12/16/20/24	0.8	8	From -16 to 90	Dark Grey/Green	

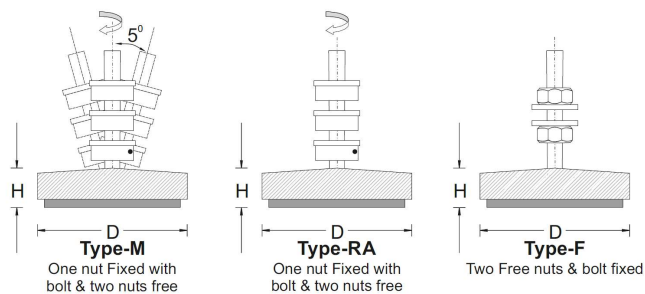

DLM1



DLM3



DLM5




DLM7



DLM9

Model	Load Capacity Kg/pc	Diameter (D) mm	Height (H) mm	Bolt Size (mm)	Possible Bolts	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (°C)	Color	Applications
DLM1-hs1-55-FG-M16x2.0x100-A-GR	410	55	71	M16X100	M10/12/16/20/24	0.8	6	From -16 to 90	Dark Grey/Green	Applications : Forging Hammers, Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses etc.
DLM2-hs1-85-FG-M16x2.0x100-A-GR	880	85	78	M16X100	M10/12/16/20/24	0.8	6	From -16 to 90	Dark Grey/Green	
DLM3-hs1-112-FG-M16x2.0x150-A-GR	1570	112	78	M16X150	M10/12/16/20/24	0.8	6	From -16 to 90	Dark Grey/Green	
DLM4-hs1-135-FG-M16x2.0x150-A-GR	2450	135	80	M16X150	M10/12/16/20/24	0.8	6	From -16 to 90	Dark Grey/Green	
DLM5-hs1-160-FG-M16x2.0x150-A-GR	3770	160	80	M16X150	M10/12/16/20/24	0.8	6	From -16 to 90	Dark Grey/Green	
DLM6-hs1-185-FG-M16x2.0x150-A-GR	4700	185	84	M16X150	M10/12/16/20/24	0.8	6	From -16 to 90	Dark Grey/Green	
DLM7-hs1-215-FG-M16x2.0x150-A-GR	6470	215	85	M16X150	M10/12/16/20/24	0.8	6	From -16 to 90	Dark Grey/Green	
DLM8-hs1-249-FG-M20x2.5x150-A-GR	7950	249	94	M20X150	M10/12/16/20/24	0.8	6	From -16 to 90	Dark Grey/Green	
DLM9-hs1-276-FG-M20x2.5x150-A-GR	10450	276	93	M20X150	M10/12/16/20/24	0.8	6	From -16 to 90	Dark Grey/Green	
DLM1-hs2-55-FG-M16x2.0x100-A-GR	160	55	71	M16X100	M10/12/16/20/24	0.8	4	From -16 to 90	Dark Grey/Green	Applications : Forging Hammers, Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses, crushers etc.
DLM2-hs2-85-FG-M16x2.0x100-A-GR	350	85	78	M16X100	M10/12/16/20/24	0.8	4	From -16 to 90	Dark Grey/Green	
DLM3-hs2-112-FG-M16x2.0x150-A-GR	630	112	78	M16X150	M10/12/16/20/24	0.8	4	From -16 to 90	Dark Grey/Green	
DLM4-hs2-135-FG-M16x2.0x150-A-GR	780	135	80	M16X150	M10/12/16/20/24	0.8	4	From -16 to 90	Dark Grey/Green	
DLM5-hs2-160-FG-M16x2.0x150-A-GR	1510	160	80	M16X150	M10/12/16/20/24	0.8	4	From -16 to 90	Dark Grey/Green	
DLM6-hs2-185-FG-M16x2.0x150-A-GR	1880	185	84	M16X150	M10/12/16/20/24	0.8	4	From -16 to 90	Dark Grey/Green	
DLM7-hs2-215-FG-M16x2.0x150-A-GR	2590	215	85	M16X150	M10/12/16/20/24	0.8	4	From -16 to 90	Dark Grey/Green	
DLM8-hs2-249-FG-M20x2.5x150-A-GR	3180	249	94	M20X150	M10/12/16/20/24	0.8	4	From -16 to 90	Dark Grey/Green	
DLM9-hs2-276-FG-M20x2.5x150-A-GR	4180	276	93	M20X150	M10/12/16/20/24	0.8	4	From -16 to 90	Dark Grey/Green	
DLM1-hs3-55-FG-M16x2.0x100-A-GR	570	55	56	M16X100	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green	
DLM2-hs3-85-FG-M16x2.0x100-A-GR	1240	85	63	M16X100	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green	
DLM3-hs3-112-FG-M16x2.0x150-A-GR	2200	112	63	M16X150	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green	

DLM4-hs3-135-FG-M16x2.0x150-A-GR	3440	135	65	M16X150	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green	Applications : Forging Hammers, Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses etc.	
DLM5-hs3-160-FG-M16x2.0x150-A-GR	5280	160	65	M16X150	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green		
DLM6-hs3-185-FG-M16x2.0x150-A-GR	6580	185	69	M16X150	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green		
DLM7-hs3-215-FG-M16x2.0x150-A-GR	9060	215	70	M16X150	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green		
DLM8-hs3-249-FG-M20x2.5x150-A-GR	11130	249	79	M20X150	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green		
DLM9-hs3-276-FG-M20x2.5x150-A-GR	14640	276	78	M20X150	M10/12/16/20/24	0.8	7	From -16 to 90	Dark Grey/Green		
DLM1-hs4-55-FG-M16x2.0x100-A-GR	245	55	56	M16X100	M10/12/16/20/24	0.8	5	From -16 to 90	Dark Grey/Green		Applications : Forging Hammers, Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses, crushers etc.
DLM2-hs4-85-FG-M16x2.0x100-A-GR	530	85	63	M16X100	M10/12/16/20/24	0.8	5	From -16 to 90	Dark Grey/Green		
DLM3-hs4-112-FG-M16x2.0x150-A-GR	940	112	63	M16X150	M10/12/16/20/24	0.8	5	From -16 to 90	Dark Grey/Green		
DLM4-hs4-135-FG-M16x2.0x150-A-GR	1470	135	65	M16X150	M10/12/16/20/24	0.8	5	From -16 to 90	Dark Grey/Green		
DLM5-hs4-160-FG-M16x2.0x150-A-GR	2270	160	65	M16X150	M10/12/16/20/24	0.8	5	From -16 to 90	Dark Grey/Green		
DLM6-hs4-185-FG-M16x2.0x150-A-GR	2820	185	69	M16X150	M10/12/16/20/24	0.8	5	From -16 to 90	Dark Grey/Green		
DLM7-hs4-215-FG-M16x2.0x150-A-GR	3880	215	70	M16X150	M10/12/16/20/24	0.8	5	From -16 to 90	Dark Grey/Green		
DLM8-hs4-249-FG-M20x2.5x150-A-GR	4770	249	79	M20X150	M10/12/16/20/24	0.8	5	From -16 to 90	Dark Grey/Green		
DLM9-hs4-276-FG-M20x2.5x150-A-GR	6270	276	78	M20X150	M10/12/16/20/24	0.8	5	From -16 to 90	Dark Grey/Green		
DLM1-hs5-55-FG-M16x2.0x100-A-GR	570	55	86	M16X100	M10/12/16/20/24	0.8	5	From -16 to 90	Dark Grey/Green	Applications : Forging Hammers, Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses etc.	
DLM2-hs5-85-FG-M16x2.0x100-A-GR	1240	85	93	M16X100	M10/12/16/20/24	0.8	5	From -16 to 90	Dark Grey/Green		
DLM3-hs5-112-FG-M16x2.0x150-A-GR	2200	112	93	M16X150	M10/12/16/20/24	0.8	5	From -16 to 90	Dark Grey/Green		
DLM4-hs5-135-FG-M16x2.0x150-A-GR	3440	135	95	M16X150	M10/12/16/20/24	0.8	5	From -16 to 90	Dark Grey/Green		
DLM5-hs5-160-FG-M16x2.0x150-A-GR	5280	160	95	M16X150	M10/12/16/20/24	0.8	5	From -16 to 90	Dark Grey/Green		
DLM6-hs5-185-FG-M16x2.0x150-A-GR	6580	185	99	M16X150	M10/12/16/20/24	0.8	5	From -16 to 90	Dark Grey/Green		
DLM7-hs5-215-FG-M16x2.0x150-A-GR	9060	215	100	M16X150	M10/12/16/20/24	0.8	5	From -16 to 90	Dark Grey/Green		
DLM8-hs5-249-FG-M20x2.5x150-A-GR	11130	249	109	M20X150	M10/12/16/20/24	0.8	5	From -16 to 90	Dark Grey/Green		
DLM9-hs5-276-FG-M20x2.5x150-A-GR	14640	276	108	M20X150	M10/12/16/20/24	0.8	5	From -16 to 90	Dark Grey/Green		

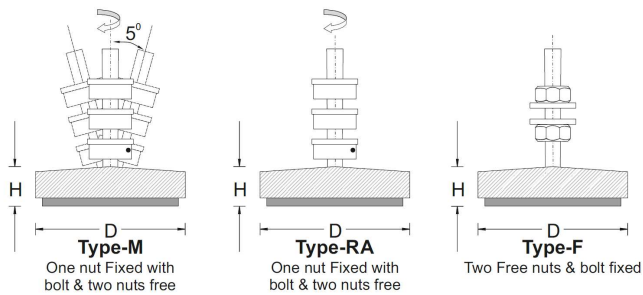

DLM1



DLM3



DLM5



DLM7



DLM9

Model	Load Capacity Kg/pc	Diameter (D) mm	Height (H) mm	Bolt Size (mm)	Possible Bolts	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (°C)	Color	Applications
DLM1-h-55-FG-M16x2.0x100-A-GR	610	55	21	M16X100	M10/12/16/20/24	0.6	45	From -16 to 90	Dark Grey/Green	Applications : Very Heavy and long bed machines, long machining centres, planners etc.
DLM2-h-85-FG-M16x2.0x100-A-GR	1330	85	28	M16X100	M10/12/16/20/24	0.6	45	From -16 to 90	Dark Grey/Green	
DLM3-h-112-FG-M16x2.0x150-A-GR	2360	112	28	M16X150	M10/12/16/20/24	0.6	45	From -16 to 90	Dark Grey/Green	
DLM4-h-135-FG-M16x2.0x150-A-GR	3680	135	30	M16X150	M10/12/16/20/24	0.6	45	From -16 to 90	Dark Grey/Green	
DLM5-h-160-FG-M16x2.0x150-A-GR	5660	160	30	M16X150	M10/12/16/20/24	0.6	45	From -16 to 90	Dark Grey/Green	
DLM6-h-185-FG-M16x2.0x150-A-GR	7050	185	34	M16X150	M10/12/16/20/24	0.6	45	From -16 to 90	Dark Grey/Green	
DLM7-h-215-FG-M16x2.0x150-A-GR	9700	215	35	M16X150	M10/12/16/20/24	0.6	45	From -16 to 90	Dark Grey/Green	
DLM8-h-249-FG-M20x2.5x150-A-GR	11930	249	44	M20X150	M10/12/16/20/24	0.6	45	From -16 to 90	Dark Grey/Green	
DLM9-h-276-FG-M20x2.5x150-A-GR	15680	276	43	M20X150	M10/12/16/20/24	0.6	45	From -16 to 90	Dark Grey/Green	