
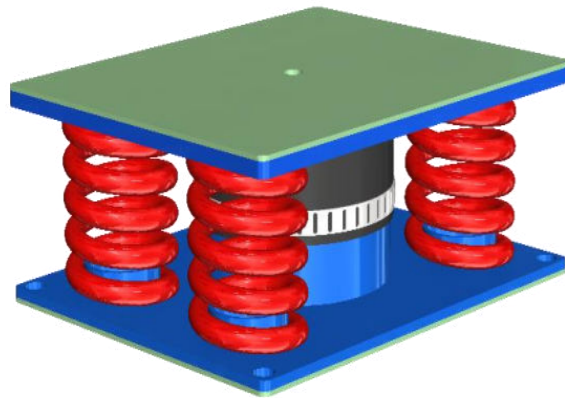
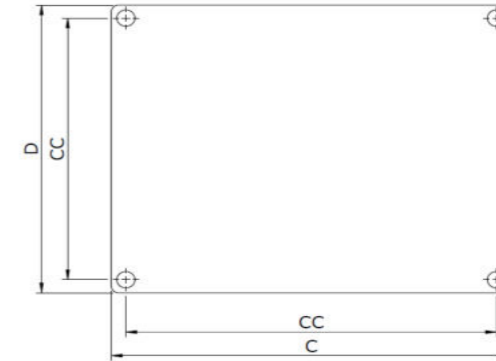
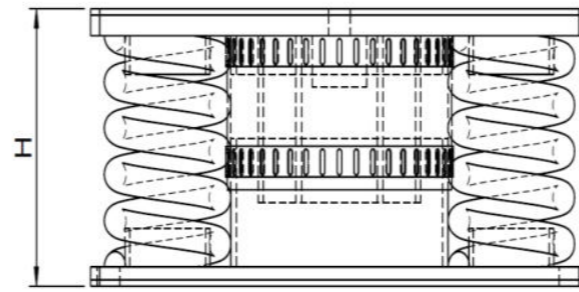


DYNEMECH SPRING ISOLATORS : SERIES RDD-OPSD With Safety Viscous Damping

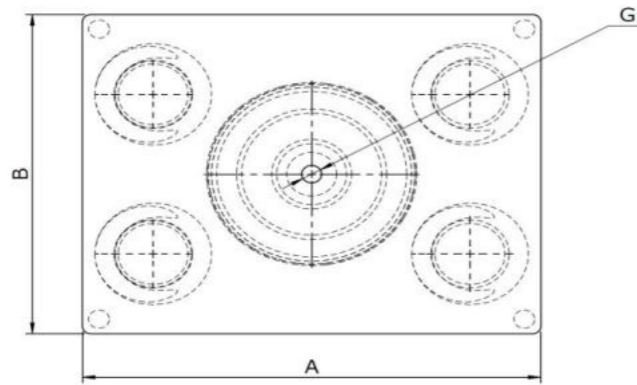

SERIES : RDD-OPSD

S. NO.	MODEL	Load (Kg)	Free Height (H)	Height at maximum Load (mm)	Bolt Size (G)	Top Plate (AxB) (mm)	Bottom Plate (Cx D) (mm)	CC (mm)	Natural Frequency range (Hz)
1	RDD-E2-OPSD	124	108	88	M16	275x220	275x220	255x200	5.0-10
2	RDD-F2-OPSD	244	108	88	M16	275x220	275x220	255x200	5.0-10
3	RDD-G1-OPSD	218	108	88	M16	275x220	275x220	255x200	5.0-10
4	RDD-G5-OPSD	314	108	88	M16	275x220	275x220	255x200	5.0-10
5	RDD-H2-OPSD	420	108	88	M16	275x220	275x220	255x200	3.5-10
6	RDD-J2-OPSD	600	108	91	M16	275x220	275x220	255x200	3.5-11
7	RDD-K6-OPSD	3400	83	77	M16	275x220	275x220	255x200	5.0-10
8	RDD-L4-OPSD	2000	108	91	M16	275x220	275x220	255x200	3.5-11
9	RDD-N5-OPSD	4800	108	93	M16	275x220	275x220	255x200	5.0-10
10	RDD-P4-OPSD	5600	108	99	M16	275x220	275x220	255x200	5.0-8.0
11	RDD-P5-OPSD	3600	98	89	M16	285x230	285x230	265x210	5.0-10