
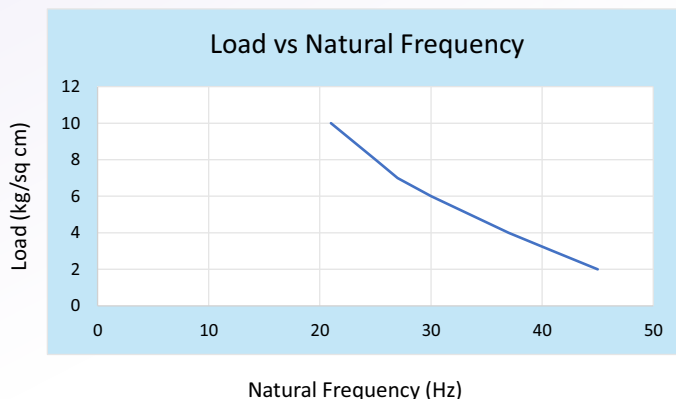


## Article Information :

Dynemech Anti-Vibration Da2 Anti Skid Plate is made from high grade synthetic composite material. This sheet is resistant to water, oils, lubricating oils, fuels etc. used in the shop floor. This sheet has defined stress value and can be placed directly under the machine as per the weight of the machine and no. of mounting positions. This plate will not deform plastically, if the weight of machine does not exceed maximum load value of this anti skid plate.

## Applications:

Anti skid Plate

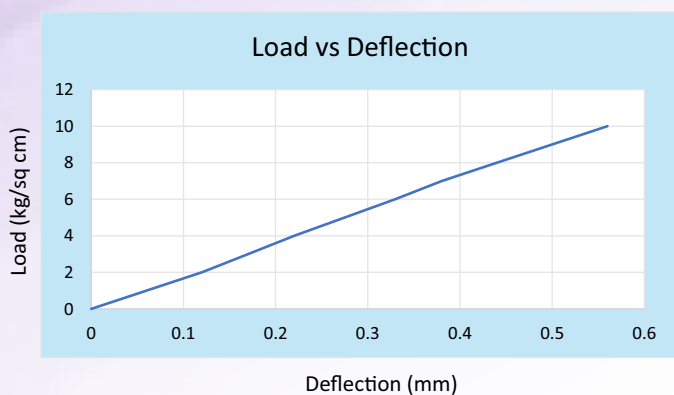

| Technical Data            |  |
|---------------------------|--|
| Load (Kg/sq cm)           | 02-10  |
| Thickness (mm)            | 08   |
| Coeff. of Friction        | 0.8  |
| Shore A Hardness          | 90-92  |
| Natural Frequency (Hz)    | 21-45  |
| UTM compression           | ASTM D575  |
| Working Temp Range        | -20 to +70   |
| Oil & Chemical Resistance | Resistant to fuels, lubricating oils, water etc. used in the shop floor  |
| Construction              | Composite material made from Neoprene Rubber. The composite material ensures high damping capacity, High compressive strength & high load capacities |

