





Before Installing of Dynemech  
Antivibration Table

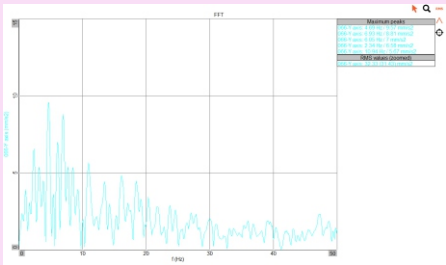

After Installing of Dynemech  
Antivibration Table

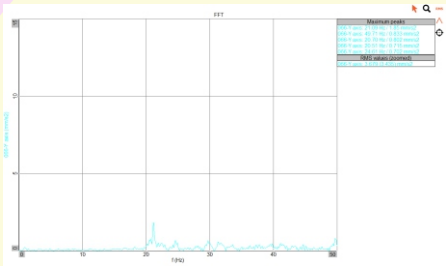

Dynemech Anti-Vibration Table **Series DIT-AS-GSR** is suitable for all types of measuring and testing equipment used in the labs and clean rooms. These tables have a levelling adjustable leg. By rotating the nut, the level of the granite top can be maintained using precision spirit level/electronic level gauge. The top is made from a heavy granite slab which ensures rigidity and keeps the system stable and ensures lower natural frequency and high damping efficiency. The flatness accuracy of these granites is of grade 'O' or 'OO' depending upon the application. The top surface of the granite slab is velvet finish to ensure smooth and lustrous finish. The frame of the table is made from the structural steel having grade IS 2062. Powder coating on the frame is done to maintain corrosion free service life of the table. A wrap-around cover is installed along the periphery to encase the insulation plates and give the table a sleek, finished appearance. The vibration isolation is achieved at 2 stages. The first stage is in the legs where the anti vibration pads are assembled in the levelling leg which damps medium to high frequency vibrations. Optional sturdy castor wheels are also provided for heavy versions for easy relocation of the table. Keyboard, CPU and monitor stands, Drawers and cabinets can also be accommodated in these tables as per the application requirements. These tables undergo a modern manufacturing process and rigorous testing before being supplied to customers. The entire process is carried out in our dedicated in-house facility.

APPLICATIONS:

- Precision Instruments: Balances, Galvanometers, Electronic Microscopes, Atomic Absorption Spectrophotometers
- Laboratories: Chemical analysis, food sample testing, scientific research
- Industries: Pharmaceuticals, Food and Beverage, Chemicals
- Semiconductor Manufacturing: Precision and accuracy in R&D
- Weighing Experiments: High-precision balances and measuring instruments
- Scientific Applications: Metrology Equipment , Thermogravimetric Analysis (TGA) , Digital Hardness Testers, HighResolution Microscopes, Surface Roughness Testers

| Sl. No. | Model            | Load (Kg.) | Length (mm) | Width (mm) | Height at mean position (mm) | Honeycomb Table Top Thickness (mm) | Natural Frequency (Hz) |
|---------|------------------|------------|-------------|------------|------------------------------|------------------------------------|------------------------|
| 1.      | DIT-AS-GSR-01    | upto 250   | 500         | 500        | 900                          | 80                                 | 7-8                    |
| 2.      | DIT-AS-GSR-01/S1 | upto 250   | 630         | 630        | 900                          | 80                                 | 7-8                    |
| 3.      | DIT-AS-GSR-02    | upto 450   | 750         | 500        | 900                          | 80                                 | 7-8                    |
| 4.      | DIT-AS-GSR-03    | upto 1250  | 900         | 600        | 900                          | 100                                | 7-8                    |
| 5.      | DIT-AS-GSR-04    | upto 1250  | 1000        | 800        | 900                          | 150                                | 7-8                    |
| 6.      | DIT-AS-GSR-05    | upto 1250  | 1200        | 1000       | 900                          | 150                                | 7-8                    |
| 7.      | DIT-AS-GSR-06    | upto 1500  | 1800        | 1500       | 900                          | 150                                | 7-8                    |

OTHER TECHNICAL SPECIFICATIONS :

| ELASTOMERIC LEGS SPECIFICATION : |                                |                                    |
|----------------------------------|--------------------------------|------------------------------------|
| 1.                               | Levelling                      | With the help of bottom DLM mounts |
| 2.                               | Height Adjustment              | 8mm                                |
| 3.                               | Vibration isolation efficiency | 65-70%                             |