


Series-DJM



Level Adjustment Range




DJM-T-U



DJM-T-M




DJM-T-I



Bolt-through 25mm
diameter bore

TYPE-T

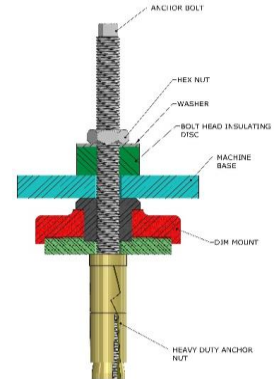

Dynemech Jackup mpunts provides isolation solutions for various machines mounting conditions. The Dynemech jackup mounts also provides for high machine leveling capabilities. These jackup mounts provide high load capacity and best level stability. The bottom design provides for non-skid properties for the jackup mount the jackup mount also provide very good passive vibration isolation.

Applications : Machine Tools, Textile Machine, Graphics machines, Planners long bedded machines etc.

S. NO.	Model	Load Capacity Kg/pc	Height (H) (mm)	Dia (D) (mm)	Thru Hole (mm)	HEX (SW) (mm)	Temperature range (°C)	Levelling Adjustment
1	DJM0-T-u-FG-RD	850	49	90	25	46	From -16 to 90	18
2	DJM1-T-u-FG-RD	1500	49	120	25	46	From -16 to 90	18
3	DJM2-T-u-FG-RD	2500	49	160	25	62	From -16 to 90	18
4	DJM0-T-m-FG-RD	440	49	90	25	46	From -16 to 90	18
5	DJM1-T-m-FG-RD	860	49	120	25	46	From -16 to 90	18
6	DJM2-T-m-FG-RD	1680	49	160	25	62	From -16 to 90	18
7	DJM0-T-i-FG-RD	610	59	90	25	46	From -16 to 90	18
8	DJM1-T-i-FG-RD	1210	59	120	25	46	From -16 to 90	18
9	DJM2-T-i-FG-RD	2310	59	160	25	62	From -16 to 90	18

NOTE : Please mention type of socket required at the time of ordering.