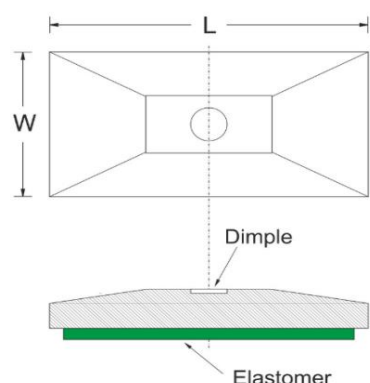


Model	Max. Load Capacity Kg/pc	Length (L) mm	Width (B) mm	Height (H) (mm)	Bottom Pad Type (mm)	Bottom Pad Thickness (mm)	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature range (°C)
SL1-u-FG-GR	350	80	64	30	Du	15	0.9	18	From -16 to 90
SL2-u-FG-GR	1000	75	150	29	Du	15	0.9	18	From -16 to 90
SL3-u-FG-GR	1400	125	125	32	Du	15	0.9	18	From -16 to 90
SL4-u-FG-GR	2000	150	150	29	Du	15	0.9	18	From -16 to 90
SL5-u-FG-GR	3600	200	200	39	Du	15	0.9	18	From -16 to 90

Applications: Tool Room Machines, Plastic Injection Moulding Machines, Pressure Die Casting Machines, Shaper, Printing &

SL1-u-10-FG-GR	350	80	64	25	Du-10	10	0.9	25	From -16 to 90
SL2-u-10-FG-GR	1000	75	150	24	Du-10	10	0.9	25	From -16 to 90
SL3-u-10-FG-GR	1400	125	125	27	Du-10	10	0.9	25	From -16 to 90
SL4-u-10-FG-GR	2000	150	150	24	Du-10	10	0.9	25	From -16 to 90
SL5-u-10-FG-GR	3600	200	200	34	Du-10	10	0.9	25	From -16 to 90

Applications: Tool Room Machines, Plastic Injection Moulding Machines, Pressure Die Casting Machines, Shaper, Printing &

SL1-u-12-FG-GR	350	80	64	27	Du-12	12	0.9	20	From -16 to 90
SL2-u-12-FG-GR	1000	75	150	26	Du-12	12	0.9	20	From -16 to 90
SL3-u-12-FG-GR	1400	125	125	29	Du-12	12	0.9	20	From -16 to 90
SL4-u-12-FG-GR	2000	150	150	26	Du-12	12	0.9	20	From -16 to 90
SL5-u-12-FG-GR	3600	200	200	36	Du-12	12	0.9	20	From -16 to 90

Applications: Tool Room Machines, Plastic Injection Moulding Machines, Pressure Die Casting Machines, Shaper, Printing &

SL1-m-FG-GR	400	80	64	30	Dm	15	0.7	30	From -16 to 90
SL2-m-FG-GR	1100	75	150	29	Dm	15	0.7	30	From -16 to 90
SL3-m-FG-GR	1700	125	125	32	Dm	15	0.7	30	From -16 to 90
SL4-m-FG-GR	2300	150	150	29	Dm	15	0.7	30	From -16 to 90
SL5-m-FG-GR	4000	200	200	39	Dm	15	0.7	30	From -16 to 90

Applications: Power Presses, Stamping Machines, Shearing Machines, Punching Machines. For machines with high vertical

SL1-i-FG-GR	600	80	64	40	Di	25	0.8	7	From -16 to 90
SL2-i-FG-GR	1600	75	150	39	Di	25	0.8	7	From -16 to 90
SL3-i-FG-GR	2000	125	125	42	Di	25	0.8	7	From -16 to 90
SL4-i-FG-GR	3200	150	150	39	Di	25	0.8	7	From -16 to 90
SL5-i-FG-GR	5600	200	200	49	Di	25	0.8	7	From -16 to 90

Applications: Power Presses, Stamping Machines, Shearing Machines, Punching Machines. For machines with high vertical

SL1-p1-FG-GR	200	80	64	35	Dp1	15	0.8	7	From -16 to 90
SL2-p1-FG-GR	450	75	150	34	Dp1	15	0.8	7	From -16 to 90
SL3-p1-FG-GR	600	125	125	37	Dp1	15	0.8	7	From -16 to 90
SL4-p1-FG-GR	900	150	150	34	Dp1	15	0.8	7	From -16 to 90

SL5-p1-FG-GR	1600	200	200	39	Dp1	15	0.8	7	From -16 to 90
Applications: Power Presses, Stamping Machines, Shearing Machines, Punching Machines. For machines with high vertical impact.									
SL1-p2-FG-GR	230	80	64	35	Dp2	20	0.8	12	From -16 to 90
SL2-p2-FG-GR	520	75	150	34	Dp2	20	0.8	12	From -16 to 90
SL3-p2-FG-GR	730	125	125	37	Dp2	20	0.8	12	From -16 to 90
SL4-p2-FG-GR	1160	150	150	34	Dp2	20	0.8	12	From -16 to 90
SL5-p2-FG-GR	1920	200	200	44	Dp2	20	0.8	12	From -16 to 90
Applications: Medium Presses, Punching Presses, Centreless Grinding Machines, Gear Shapers, High Speed Machines on u									
SL1-p3-FG-GR	270	80	64	39	Dp3	24	0.8	7	From -16 to 90
SL2-p3-FG-GR	620	75	150	38	Dp3	24	0.8	7	From -16 to 90
SL3-p3-FG-GR	880	125	125	41	Dp3	24	0.8	7	From -16 to 90
SL4-p3-FG-GR	1280	150	150	38	Dp3	24	0.8	7	From -16 to 90
SL5-p3-FG-GR	2300	200	200	48	Dp3	24	0.8	7	From -16 to 90
Applications: Tool Room Machines on suspended Floors, Light Weight Presses, Compressors etc.									
SL1-s1-FG-GR	230	80	64	35	Ds1	20	0.8	15	From -16 to 90
SL2-s1-FG-GR	520	75	150	34	Ds1	20	0.8	15	From -16 to 90
SL3-s1-FG-GR	730	125	125	37	Ds1	20	0.8	15	From -16 to 90
SL4-s1-FG-GR	1160	150	150	34	Ds1	20	0.8	15	From -16 to 90
SL5-s1-FG-GR	1920	200	200	44	Ds1	20	0.8	15	From -16 to 90
Applications: Tool Room Machines, Plastic Injection Moulding Machines, Pressure Die Casting Machines, Shaper, Printing &									
SL1-s2-FG-GR	360	80	64	40	Ds2	25	0.8	8	From -16 to 90
SL2-s2-FG-GR	830	75	150	39	Ds2	25	0.8	8	From -16 to 90
SL3-s2-FG-GR	1180	125	125	42	Ds2	25	0.8	8	From -16 to 90
SL4-s2-FG-GR	1700	150	150	39	Ds2	25	0.8	8	From -16 to 90
SL5-s2-FG-GR	3000	200	200	49	Ds2	25	0.8	8	From -16 to 90
Applications: Power Presses, Stamping Machines, Shearing Machines, Punching Machines. For machines with high vertical									
SL1-hs1-FG-GR	910	80	64	80	Dhs1	65	0.8	6	From -16 to 90
SL2-hs1-FG-GR	2080	75	150	79	Dhs1	65	0.8	6	From -16 to 90
SL3-hs1-FG-GR	3000	125	125	82	Dhs1	65	0.8	6	From -16 to 90
SL4-hs1-FG-GR	4270	150	150	79	Dhs1	65	0.8	6	From -16 to 90
SL5-hs1-FG-GR	7690	200	200	89	Dhs1	65	0.8	6	From -16 to 90
Applications : Forging Hammers, Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses etc.									
SL1-hs2-FG-GR	360	80	64	80	Dhs2	65	0.8	4	From -16 to 90
SL2-hs2-FG-GR	830	75	150	79	Dhs2	65	0.8	4	From -16 to 90
SL3-hs2-FG-GR	1180	125	125	82	Dhs2	65	0.8	4	From -16 to 90
SL4-hs2-FG-GR	1700	150	150	79	Dhs2	65	0.8	4	From -16 to 90
SL5-hs2-FG-GR	3000	200	200	89	Dhs2	65	0.8	4	From -16 to 90
Applications : Forging Hammers, Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses, crushers etc.									
SL1-hs3-FG-GR	1280	80	64	65	Dhs3	50	0.8	7	From -16 to 90
SL2-hs3-FG-GR	2900	75	150	64	Dhs3	50	0.8	7	From -16 to 90
SL3-hs3-FG-GR	4100	125	125	67	Dhs3	50	0.8	7	From -16 to 90
SL4-hs3-FG-GR	6000	150	150	64	Dhs3	50	0.8	7	From -16 to 90
SL5-hs3-FG-GR	10800	200	200	74	Dhs3	50	0.8	7	From -16 to 90
Applications : Forging Hammers, Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses etc.									
SL1-hs4-FG-GR	550	80	64	65	Dhs4	50	0.8	5	From -16 to 90
SL2-hs4-FG-GR	1250	75	150	64	Dhs4	50	0.8	5	From -16 to 90
SL3-hs4-FG-GR	1760	125	125	67	Dhs4	50	0.8	5	From -16 to 90
SL4-hs4-FG-GR	2560	150	150	64	Dhs4	50	0.8	5	From -16 to 90
SL5-hs4-FG-GR	4600	200	200	74	Dhs4	50	0.8	5	From -16 to 90
Applications : Forging Hammers, Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses, crushers etc.									
SL1-hs5-FG-GR	1280	80	64	95	Dhs5	80	0.8	5	From -16 to 90
SL2-hs5-FG-GR	2900	75	150	94	Dhs5	80	0.8	5	From -16 to 90

SL3-hs5-FG-GR	4100	125	125	97	Dhs5	80	0.8	5	From -16 to 90
SL4-hs5-FG-GR	6000	150	150	94	Dhs5	80	0.8	5	From -16 to 90
SL5-hs5-FG-GR	10800	200	200	104	Dhs5	80	0.8	5	From -16 to 90
Applications : Forging Hammers, Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses etc.									
SL1-h-FG-GR	1400	80	64	30	Dh	15	0.6	45	From -16 to 90
SL2-h-FG-GR	3100	75	150	29	Dh	15	0.6	45	From -16 to 90
SL3-h-FG-GR	4400	125	125	32	Dh	15	0.6	45	From -16 to 90
SL4-h-FG-GR	6400	150	150	29	Dh	15	0.6	45	From -16 to 90
SL5-h-FG-GR	11500	200	200	39	Dh	15	0.6	45	From -16 to 90
Applications : Very Heavy and long bed machines, long machining centres, planners etc.									