



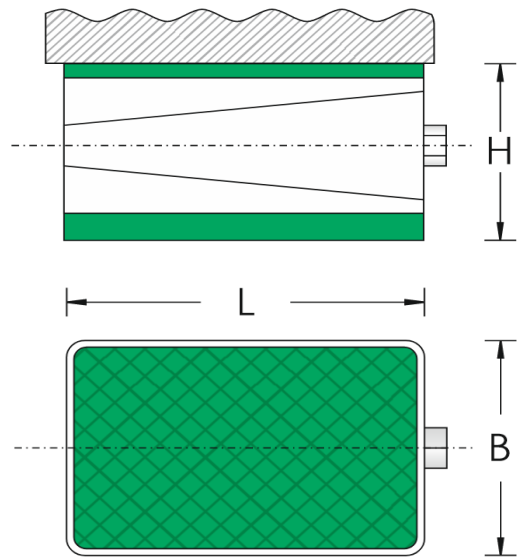

Dynemech Wedge Mounts, Series DF are designed for industrial machine tools that require precision levelling. This three piece wedge mount has an adjustable bolt which moves the centre wedge between top & bottom wedges. Anti - skid plate is provided on the top wedge therefore, machines are installed as free standing. Large supporting surface ensures solidity and rigidity.Vibration reduction is possible through assembling respective Dynemech Insulation plates.

Model	Load Capacity Kg/pc	Length (L) mm	Width (B) mm	Height (H) at mean position (mm)	Adjustment Range (mm)	Bottom pad Type	Bottom pad Thickness (mm)	Top pad Type	Top pad Thickness (mm)	SW1 (mm)	SW2 (mm)	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (° C)	Color	Applications
DF1-U-A2-FG-DG	400	105	55	60	+4/-4	Du	15	Da2	8	16	8	0.9	18	From -16 to 90	Dark Grey/Green	Tool Room Machines, Plastic Injection Moulding Machines, Pressure Die Casting Machines, Shaper, Printing and Textile Machines etc.
DF2-U-A2-FG-DG	900	150	75	63	+5/-5	Du	15	Da2	8	19	10	0.9	18	From -16 to 90	Dark Grey/Green	
DF3-U-A2-FG-DG	1500	200	100	70	+5/-5	Du	15	Da2	8	22	12	0.9	18	From -16 to 90	Dark Grey/Green	
DF4-U-A2-FG-DG	3200	200	200	73	+6/-6	Du	15	Da2	8	22	12	0.9	18	From -16 to 90	Dark Grey/Green	
DF5-U-A2-FG-DG	4000	200	250	93	+9/-9	Du	15	Da2	8	27	14	0.9	18	From -16 to 90	Dark Grey/Green	
DF6-U-A2-FG-DG	6400	250	320	98	+9/-9	Du	15	Da2	8	32	18	0.9	18	From -16 to 90	Dark Grey/Green	
DF7-U-A2-FG-DG	9600	300	400	98	+10/-10	Du	15	Da2	8	32	18	0.9	18	From -16 to 90	Dark Grey/Green	
DF8-U-A2-FG-DG	16000	400	500	103	+10/-10	Du	15	Da2	8	39	22	0.9	18	From -16 to 90	Dark Grey/Green	
DF1-U-10-A2-FG-DG	400	105	55	55	+4/-4	Du-10	10	Da2	8	16	8	0.9	25	From -16 to 90	Dark Grey/Green	Tool Room Machines, Plastic Injection Moulding Machines, Pressure Die Casting Machines, Shaper, Printing and Textile Machines etc.
DF2-U-10-A2-FG-DG	900	150	75	58	+5/-5	Du-10	10	Da2	8	19	10	0.9	25	From -16 to 90	Dark Grey/Green	
DF3-U-10-A2-FG-DG	1500	200	100	65	+5/-5	Du-10	10	Da2	8	22	12	0.9	25	From -16 to 90	Dark Grey/Green	
DF4-U-10-A2-FGDG	3200	200	200	68	+6/-6	Du-10	10	Da2	8	22	12	0.9	25	From -16 to 90	Dark Grey/Green	
DF5-U-10-A2-FG-DG	4000	200	250	88	+9/-9	Du-10	10	Da2	8	27	14	0.9	25	From -16 to 90	Dark Grey/Green	
DF6-U-10-A2-FG-DG	6400	250	320	93	+9/-9	Du-10	10	Da2	8	32	18	0.9	25	From -16 to 90	Dark Grey/Green	
DF7-U-10-A2-FG-DG	9600	300	400	93	+10/-10	Du-10	10	Da2	8	32	18	0.9	25	From -16 to 90	Dark Grey/Green	
DF8-U-10-A2-FG-DG	16000	400	500	98	+10/-10	Du-10	10	Da2	8	39	22	0.9	25	From -16 to 90	Dark Grey/Green	
DF1-U-12-A2-FG-DG	400	105	55	57	+4/-4	Du-12	12	Da2	8	16	8	0.9	20	From -16 to 90	Dark Grey/Green	Applications: Tool Room Machines, Plastic Injection Moulding Machines, Pressure Die Casting Machines, Shaper, Printing and Textile Machines etc.
DF2-U-12-A2-FG-DG	900	150	75	60	+5/-5	Du-12	12	Da2	8	19	10	0.9	20	From -16 to 90	Dark Grey/Green	
DF3-U-12-A2-FGDG	1500	200	100	67	+5/-5	Du-12	12	Da2	8	22	12	0.9	20	From -16 to 90	Dark Grey/Green	
DF4-U-12-A2-FG-DG	3200	200	200	70	+6/-6	Du-12	12	Da2	8	22	12	0.9	20	From -16 to 90	Dark Grey/Green	
DF5-U-12-A2-FG-DG	4000	200	250	90	+9/-9	Du-12	12	Da2	8	27	14	0.9	20	From -16 to 90	Dark Grey/Green	
DF6-U-12-A2-FG-DG	6400	250	320	95	+9/-9	Du-12	12	Da2	8	32	18	0.9	20	From -16 to 90	Dark Grey/Green	
DF7-U-12-A2-FG-DG	9600	300	400	95	+10/-10	Du-12	12	Da2	8	32	18	0.9	20	From -16 to 90	Dark Grey/Green	
DF8-U-12-A2-FG-DG	16000	400	500	100	+10/-10	Du-12	12	Da2	8	39	22	0.9	20	From -16 to 90	Dark Grey/Green	

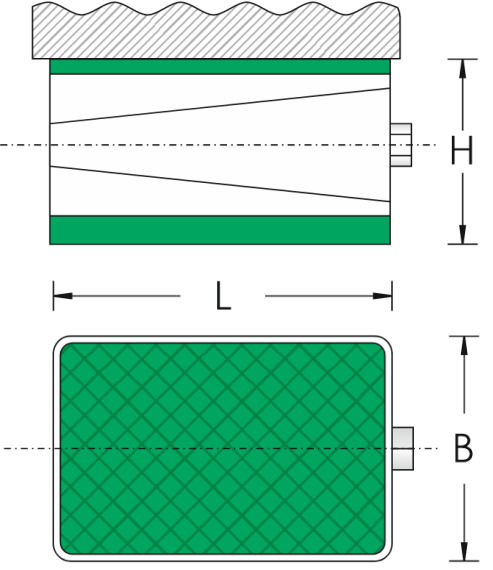

DF1


DF3

DF5

DF7

DF8

Model	Load Capacity Kg/pc	Length (L) mm	Width (B) mm	Height (H) at mean position (mm)	Adjustment Range (mm)	Bottom pad Type	Bottom pad Thickness (mm)	Top pad Type	Top pad Thickness (mm)	SW1 (mm)	SW2 (mm)	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (° C)	Color	Applications
DF1-M-A1-FG-DG	500	105	55	54	+4/-4	Dm	15	Da1	2	16	8	0.7	30	From -16 to 90	Dark Grey/Green	Applications: Lathe Machines, Machining Centres, Milling Machines, Precision Grinding Machines, Drilling Machines, Turning Centres, Transfer Lines etc.
DF2-M-A1-FG-DG	1200	150	75	57	+5/-5	Dm	15	Da1	2	19	10	0.7	30	From -16 to 90	Dark Grey/Green	
DF3-M-A1-FG-DG	2000	200	100	64	+5/-5	Dm	15	Da1	2	22	12	0.7	30	From -16 to 90	Dark Grey/Green	
DF4-M-A1-FG-DG	4000	200	200	67	+6/-6	Dm	15	Da1	2	22	12	0.7	30	From -16 to 90	Dark Grey/Green	
DF5-M-A1-FG-DG	5000	200	250	87	+9/-9	Dm	15	Da1	2	27	14	0.7	30	From -16 to 90	Dark Grey/Green	
DF6-M-A1-FG-DG	8000	250	320	92	+9/-9	Dm	15	Da1	2	32	18	0.7	30	From -16 to 90	Dark Grey/Green	
DF7-M-A1-FG-DG	12000	300	400	92	+10/-10	Dm	15	Da1	2	32	18	0.7	30	From -16 to 90	Dark Grey/Green	
DF8-M-A1-FG-DG	20000	400	500	97	+10/-10	Dm	15	Da1	2	39	22	0.7	30	From -16 to 90	Dark Grey/Green	

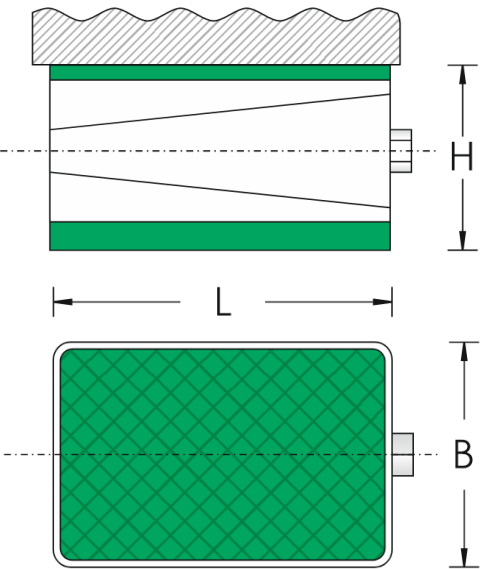

DF1



DF3

DF5


DF7

DF8

Model	Load Capacity Kg/pc	Length (L) mm	Width (B) mm	Height (H) at mean position (mm)	Adjustment Range (mm)	Bottom pad Type	Bottom pad Thickness (mm)	Top pad Type	Top pad Thickness (mm)	SW1 (mm)	SW2 (mm)	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (° C)	Color	Applications
DF1-i-A2-FG-DG	600	105	55	70	+4/-4	Di	25	Da2	8	16	8	0.8	7	From -16 to 90	Dark Grey/Green	Applications: Power Presses, Stamping Machines, Shearing Machines, Punching Machines.
DF2-i-A2-FG-DG	1500	150	75	73	+5/-5	Di	25	Da2	8	19	10	0.8	7	From -16 to 90	Dark Grey/Green	
DF3-i-A2-FG-DG	2500	200	100	80	+5/-5	Di	25	Da2	8	22	12	0.8	7	From -16 to 90	Dark Grey/Green	
DF4-i-A2-FG-DG	5200	200	200	83	+6/-6	Di	25	Da2	8	22	12	0.8	7	From -16 to 90	Dark Grey/Green	
DF5-i-A2-FG-DG	6500	200	250	103	+9/-9	Di	25	Da2	8	27	14	0.8	7	From -16 to 90	Dark Grey/Green	
DF6-i-A2-FG-DG	10000	250	320	108	+9/-9	Di	25	Da2	8	32	18	0.8	7	From -16 to 90	Dark Grey/Green	
DF7-i-A2-FG-DG	15000	300	400	108	+10/-10	Di	25	Da2	8	32	18	0.8	7	From -16 to 90	Dark Grey/Green	
DF8-i-A2-FG-DG	26000	400	500	113	+10/-10	Di	25	Da2	8	39	22	0.8	7	From -16 to 90	Dark Grey/Green	

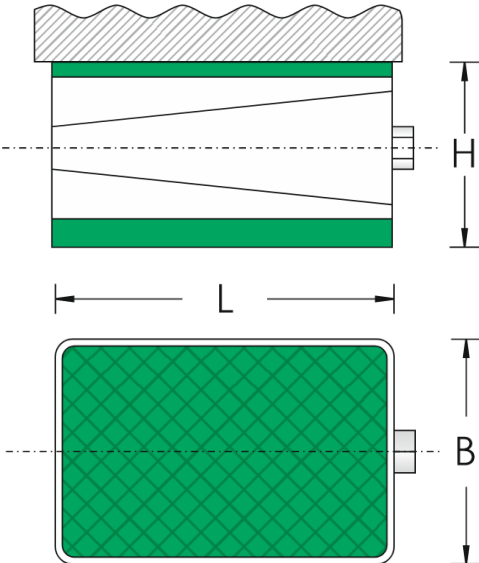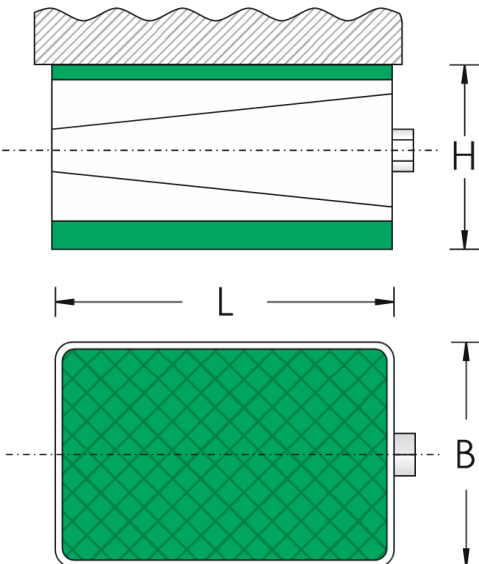  DF1 DF3 DF5 DF7 DF8																
Model	Load Capacity Kg/pc	Length (L) mm	Width (B) mm	Height (H) at mean position (mm)	Adjustment Range (mm)	Bottom pad Type	Bottom pad Thickness (mm)	Top pad Type	Top pad Thickness (mm)	SW1 (mm)	SW2 (mm)	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (° C)	Color	Applications
DF1-p1-A1-FG-DG	230	105	55	54	+4/-4	Dp1	15	Da1	2	16	8	0.8	7	From -16 to 90	Dark Grey/Green	Applications: Passive vibration control of measuring & Testing Machines, Grinders etc.
DF2-p1-A1-FG-DG	450	150	75	57	+5/-5	Dp1	15	Da1	2	19	10	0.8	7	From -16 to 90	Dark Grey/Green	
DF3-p1-A1-FG-DG	800	200	100	64	+5/-5	Dp1	15	Da1	2	22	12	0.8	7	From -16 to 90	Dark Grey/Green	
DF4-p1-A1-FG-DG	1600	200	200	67	+6/-6	Dp1	15	Da1	2	22	12	0.8	7	From -16 to 90	Dark Grey/Green	
DF5-p1-A1-FG-DG	2000	200	250	87	+9/-9	Dp1	15	Da1	2	27	14	0.8	7	From -16 to 90	Dark Grey/Green	
DF6-p1-A1-FG-DG	3200	250	320	92	+9/-9	Dp1	15	Da1	2	32	18	0.8	7	From -16 to 90	Dark Grey/Green	
DF7-p1-A1-FG-DG	4800	300	400	92	+10/-10	Dp1	15	Da1	2	32	18	0.8	7	From -16 to 90	Dark Grey/Green	
DF8-p1-A1-FG-DG	8000	400	500	97	+10/-10	Dp1	15	Da1	2	39	22	0.8	7	From -16 to 90	Dark Grey/Green	
DF1-p2-A1-FG-DG	180	105	55	59	+4/-4	Dp2	20	Da1	2	16	8	0.8	12	From -16 to 90	Dark Grey/Green	Applications : Measuring & Testing Machines, Surface Plates, Hardness Testers, Microscopes, EDM Machines, Profile Projectors etc.
DF2-p2-A1-FG-DG	400	150	75	62	+5/-5	Dp2	20	Da1	2	19	10	0.8	12	From -16 to 90	Dark Grey/Green	
DF3-p2-A1-FG-DG	725	200	100	69	+5/-5	Dp2	20	Da1	2	22	12	0.8	12	From -16 to 90	Dark Grey/Green	
DF4-p2-A1-FG-DG	1450	200	200	72	+6/-6	Dp2	20	Da1	2	22	12	0.8	12	From -16 to 90	Dark Grey/Green	
DF5-p2-A1-FG-DG	1800	200	250	92	+9/-9	Dp2	20	Da1	2	27	14	0.8	12	From -16 to 90	Dark Grey/Green	
DF6-p2-A1-FG-DG	2900	250	320	97	+9/-9	Dp2	20	Da1	2	32	18	0.8	12	From -16 to 90	Dark Grey/Green	
DF7-p2-A1-FG-DG	4400	300	400	97	+10/-10	Dp2	20	Da1	2	32	18	0.8	12	From -16 to 90	Dark Grey/Green	
DF8-p2-A1-FG-DG	7500	400	500	102	+10/-10	Dp2	20	Da1	2	39	22	0.8	12	From -16 to 90	Dark Grey/Green	
DF1-p3-A1-FG-DG	340	105	55	63	+4/-4	Dp3	24	Da1	2	16	8	0.8	7	From -16 to 90	Dark Grey/Green	Applications : Active & Passive vibration isolation of metrology and production machines.
DF2-p3-A1-FG-DG	670	150	75	66	+5/-5	Dp3	24	Da1	2	19	10	0.8	7	From -16 to 90	Dark Grey/Green	
DF3-p3-A1-FG-DG	1200	200	100	73	+5/-5	Dp3	24	Da1	2	22	12	0.8	7	From -16 to 90	Dark Grey/Green	
DF4-p3-A1-FG-DG	2400	200	200	76	+6/-6	Dp3	24	Da1	2	22	12	0.8	7	From -16 to 90	Dark Grey/Green	
DF5-p3-A1-FG-DG	3000	200	250	96	+9/-9	Dp3	24	Da1	2	27	14	0.8	7	From -16 to 90	Dark Grey/Green	
DF6-p3-A1-FG-DG	4800	250	320	101	+9/-9	Dp3	24	Da1	2	32	18	0.8	7	From -16 to 90	Dark Grey/Green	
DF7-p3-A1-FG-DG	7200	300	400	101	+10/-10	Dp3	24	Da1	2	32	18	0.8	7	From -16 to 90	Dark Grey/Green	
DF8-p3-A1-FG-DG	12000	400	500	106	+10/-10	Dp3	24	Da1	2	39	22	0.8	7	From -16 to 90	Dark Grey/Green	
  DF1 DF3 DF5 DF7 DF8																
Model	Load Capacity Kg/pc	Length (L) mm	Width (B) mm	Height (H) at mean position (mm)	Adjustment Range (mm)	Bottom pad Type	Bottom pad Thickness (mm)	Top pad Type	Top pad Thickness (mm)	SW1 (mm)	SW2 (mm)	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (° C)	Color	Applications
DF1-s1-A1-FG-DG	280	105	55	59	+4/-4	Ds1	20	Da1	2	16	8	0.8	15	From -16 to 90	Dark Grey/Green	
DF2-s1-A1-FG-DG	560	150	75	62	+5/-5	Ds1	20	Da1	2	19	10	0.8	15	From -16 to 90	Dark Grey/Green	

DF3-s1-A1-FG-DG	1000	200	100	69	+5/-5	Ds1	20	Da1	2	22	12	0.8	15	From -16 to 90	Dark Grey/Green	Applications : Active & Passive vibration isolation of metrology and production machines.
DF4-s1-A1-FG-DG	2000	200	200	72	+6/-6	Ds1	20	Da1	2	22	12	0.8	15	From -16 to 90	Dark Grey/Green	
DF5-s1-A1-FG-DG	2500	200	250	92	+9/-9	Ds1	20	Da1	2	27	14	0.8	15	From -16 to 90	Dark Grey/Green	
DF6-s1-A1-FG-DG	4000	250	320	97	+9/-9	Ds1	20	Da1	2	32	18	0.8	15	From -16 to 90	Dark Grey/Green	
DF7-s1-A1-FG-DG	6000	300	400	97	+10/-10	Ds1	20	Da1	2	32	18	0.8	15	From -16 to 90	Dark Grey/Green	
DF8-s1-A1-FG-DG	10000	400	500	102	+10/-10	Ds1	20	Da1	2	39	22	0.8	15	From -16 to 90	Dark Grey/Green	
DF1-s2-A1-FG-DG	350	105	55	64	+4/-4	Ds2	25	Da1	2	16	8	0.8	8	From -16 to 90	Dark Grey/Green	Applications : Medium Presses, Stamping machines, also well suited for high speed rotating machines on upper floors.
DF2-s2-A1-FG-DG	800	150	75	67	+5/-5	Ds2	25	Da1	2	19	10	0.8	8	From -16 to 90	Dark Grey/Green	
DF3-s2-A1-FG-DG	1400	200	100	74	+5/-5	Ds2	25	Da1	2	22	12	0.8	8	From -16 to 90	Dark Grey/Green	
DF4-s2-A1-FG-DG	2800	200	200	77	+6/-6	Ds2	25	Da1	2	22	12	0.8	8	From -16 to 90	Dark Grey/Green	
DF5-s2-A1-FG-DG	3500	200	250	97	+9/-9	Ds2	25	Da1	2	27	14	0.8	8	From -16 to 90	Dark Grey/Green	
DF6-s2-A1-FG-DG	5500	250	320	102	+9/-9	Ds2	25	Da1	2	32	18	0.8	8	From -16 to 90	Dark Grey/Green	
DF7-s2-A1-FG-DG	8500	300	400	102	+10/-10	Ds2	25	Da1	2	32	18	0.8	8	From -16 to 90	Dark Grey/Green	
DF8-s2-A1-FG-DG	14000	400	500	107	+10/-10	Ds2	25	Da1	2	39	22	0.8	8	From -16 to 90	Dark Grey/Green	

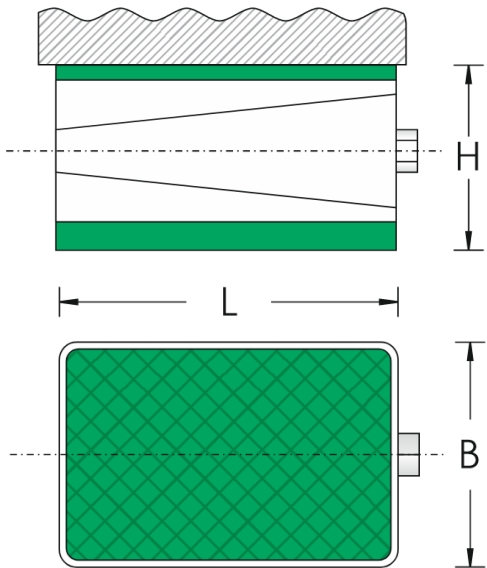


DF1

DF3


DF5

DF7

DF8

Model	Load Capacity Kg/pc	Length (L) mm	Width (B) mm	Height (H) at mean position (mm)	Adjustment Range (mm)	Bottom pad Type	Bottom pad Thickness (mm)	Top pad Type	Top pad Thickness (mm)	SW1 (mm)	SW2 (mm)	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (° C)	Color	Applications
DF1-hs1-A2-FG-DG	1155	105	55	110	+4/-4	Dhs1	65	Da2	8	16	8	0.8	6	From -16 to 90	Dark Grey/Green	Applications : Forging Hammers, Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses etc.
DF2-hs1-A2-FG-DG	2250	150	75	113	+5/-5	Dhs1	65	Da2	8	19	10	0.8	6	From -16 to 90	Dark Grey/Green	
DF3-hs1-A2-FG-DG	4000	200	100	120	+5/-5	Dhs1	65	Da2	8	22	12	0.8	6	From -16 to 90	Dark Grey/Green	
DF4-hs1-A2-FG-DG	8000	200	200	123	+6/-6	Dhs1	65	Da2	8	22	12	0.8	6	From -16 to 90	Dark Grey/Green	
DF5-hs1-A2-FG-DG	10000	200	250	143	+9/-9	Dhs1	65	Da2	8	27	14	0.8	6	From -16 to 90	Dark Grey/Green	
DF6-hs1-A2-FG-DG	16000	250	320	148	+9/-9	Dhs1	65	Da2	8	32	18	0.8	6	From -16 to 90	Dark Grey/Green	
DF7-hs1-A2-FG-DG	24000	300	400	148	+10/-10	Dhs1	65	Da2	8	32	18	0.8	6	From -16 to 90	Dark Grey/Green	
DF8-hs1-A2-FG-DG	40000	400	500	153	+10/-10	Dhs1	65	Da2	8	39	22	0.8	6	From -16 to 90	Dark Grey/Green	Applications : Forging Hammers, Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses, crushers etc.
DF1-hs2-A1-FG-DG	460	105	55	104	+4/-4	Dhs2	65	Da1	2	16	8	0.8	4	From -16 to 90	Dark Grey/Green	
DF2-hs2-A1-FG-DG	900	150	75	107	+5/-5	Dhs2	65	Da1	2	19	10	0.8	4	From -16 to 90	Dark Grey/Green	
DF3-hs2-A1-FG-DG	1600	200	100	114	+5/-5	Dhs2	65	Da1	2	22	12	0.8	4	From -16 to 90	Dark Grey/Green	
DF4-hs2-A1-FG-DG	3200	200	200	117	+6/-6	Dhs2	65	Da1	2	22	12	0.8	4	From -16 to 90	Dark Grey/Green	
DF5-hs2-A1-FG-DG	4000	200	250	137	+9/-9	Dhs2	65	Da1	2	27	14	0.8	4	From -16 to 90	Dark Grey/Green	
DF6-hs2-A1-FG-DG	6400	250	320	142	+9/-9	Dhs2	65	Da1	2	32	18	0.8	4	From -16 to 90	Dark Grey/Green	
DF7-hs2-A1-FG-DG	9600	300	400	142	+10/-10	Dhs2	65	Da1	2	32	18	0.8	4	From -16 to 90	Dark Grey/Green	Applications : Forging Hammers, Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses etc.
DF8-hs2-A1-FG-DG	16000	400	500	147	+10/-10	Dhs2	65	Da1	2	39	22	0.8	4	From -16 to 90	Dark Grey/Green	
DF1-hs3-A2-FG-DG	1600	105	55	95	+4/-4	Dhs3	50	Da2	8	16	8	0.8	7	From -16 to 90	Dark Grey/Green	
DF2-hs3-A2-FG-DG	3100	150	75	98	+5/-5	Dhs3	50	Da2	8	19	10	0.8	7	From -16 to 90	Dark Grey/Green	
DF3-hs3-A2-FG-DG	5600	200	100	105	+5/-5	Dhs3	50	Da2	8	22	12	0.8	7	From -16 to 90	Dark Grey/Green	
DF4-hs3-A2-FG-DG	11200	200	200	108	+6/-6	Dhs3	50	Da2	8	22	12	0.8	7	From -16 to 90	Dark Grey/Green	
DF5-hs3-A2-FG-DG	14000	200	250	128	+9/-9	Dhs3	50	Da2	8	27	14	0.8	7	From -16 to 90	Dark Grey/Green	
DF6-hs3-A2-FG-DG	22400	250	320	133	+9/-9	Dhs3	50	Da2	8	32	18	0.8	7	From -16 to 90	Dark Grey/Green	Applications : Forging Hammers, Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses, crushers etc.
DF7-hs3-A2-FG-DG	33600	300	400	133	+10/-10	Dhs3	50	Da2	8	32	18	0.8	7	From -16 to 90	Dark Grey/Green	
DF8-hs3-A2-FG-DG	56000	400	500	138	+10/-10	Dhs3	50	Da2	8	39	22	0.8	7	From -16 to 90	Dark Grey/Green	
DF1-hs4-A1-FG-DG	690	105	55	89	+4/-4	Dhs4	50	Da1	2	16	8	0.8	5	From -16 to 90	Dark Grey/Green	
DF2-hs4-A1-FG-DG	1300	150	75	92	+5/-5	Dhs4	50	Da1	2	19	10	0.8	5	From -16 to 90	Dark Grey/Green	
DF3-hs4-A1-FG-DG	2400	200	100	99	+5/-5	Dhs4	50	Da1	2	22	12	0.8	5	From -16 to 90	Dark Grey/Green	
DF4-hs4-A1-FG-DG	4800	200	200	102	+6/-6	Dhs4	50	Da1	2	22	12	0.8	5	From -16 to 90	Dark Grey/Green	
DF5-hs4-A1-FG-DG	6000	200	250	122	+9/-9	Dhs4	50	Da1	2	27	14	0.8	5	From -16 to 90	Dark Grey/Green	Applications : Forging Hammers, Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses, crushers etc.
DF6-hs4-A1-FG-DG	9600	250	320	127	+9/-9	Dhs4	50	Da1	2	32	18	0.8	5	From -16 to 90	Dark Grey/Green	
DF7-hs4-A1-FG-DG	14400	300	400	127	+10/-10	Dhs4	50	Da1	2	32	18	0.8	5	From -16 to 90	Dark Grey/Green	
DF8-hs4-A1-FG-DG	24000	400	500	132	+10/-10	Dhs4	50	Da1	2	39	22	0.8	5	From -16 to 90	Dark Grey/Green	
DF1-hs5-A2-FG-DG	1600	105	55	125	+4/-4	Dhs5	80	Da2	8	16	8	0.8	5	From -16 to 90	Dark Grey/Green	
DF2-hs5-A2-FG-DG	3100	150	75	128	+5/-5	Dhs5	80	Da2	8	19	10	0.8	5	From -16 to 90	Dark Grey/Green	
DF3-hs5-A2-FG-DG	5600	200	100	135	+5/-5	Dhs5	80	Da2	8	22	12	0.8	5	From -16 to 90	Dark Grey/Green	Applications : Forging Hammers,

DF4-hs5-A2-FG-DG	11200	200	200	138	+6/-6	Dhs5	80	Da2	8	22	12	0.8	5	From -16 to 90	Dark Grey/Green	Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses etc.
DF5-hs5-A2-FG-DG	14000	200	250	158	+9/-9	Dhs5	80	Da2	8	27	14	0.8	5	From -16 to 90	Dark Grey/Green	
DF6-hs5-A2-FG-DG	22400	250	320	163	+9/-9	Dhs5	80	Da2	8	32	18	0.8	5	From -16 to 90	Dark Grey/Green	
DF7-hs5-A2-FG-DG	33600	300	400	163	+10/-10	Dhs5	80	Da2	8	32	18	0.8	5	From -16 to 90	Dark Grey/Green	
DF8-hs5-A2-FG-DG	56000	400	500	168	+10/-10	Dhs5	80	Da2	8	39	22	0.8	5	From -16 to 90	Dark Grey/Green	

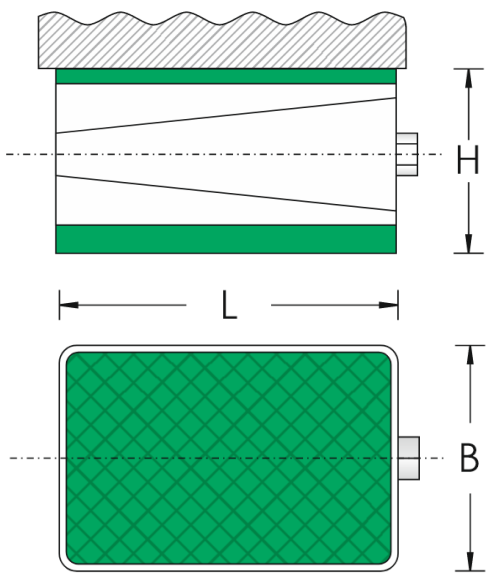






DF1


DF3

DF5

DF7

DF8

Model	Load Capacity Kg/pc	Length (L) mm	Width (B) mm	Height (H) at mean position (mm)	Adjustment Range (mm)	Bottom pad Type	Bottom pad Thickness (mm)	Top pad Type	Top pad Thickness (mm)	SW1 (mm)	SW2 (mm)	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (° C)	Color	Applications
DF1-h-A2-FG-DG	1740	105	55	60	+4/-4	Dh	15	Da2	8	16	8	0.6	45	From -16 to 90	Dark Grey/Green	Applications : Very Heavy and long bed machines, long machining centres, planners etc.
DF2-h-A2-FG-DG	3380	150	75	63	+5/-5	Dh	15	Da2	8	19	10	0.6	45	From -16 to 90	Dark Grey/Green	
DF3-h-A2-FG-DG	6000	200	100	70	+5/-5	Dh	15	Da2	8	22	12	0.6	45	From -16 to 90	Dark Grey/Green	
DF4-h-A2-FG-DG	12000	200	200	73	+6/-6	Dh	15	Da2	8	22	12	0.6	45	From -16 to 90	Dark Grey/Green	
DF5-h-A2-FG-DG	15000	200	250	93	+9/-9	Dh	15	Da2	8	27	14	0.6	45	From -16 to 90	Dark Grey/Green	
DF6-h-A2-FG-DG	24000	250	320	98	+9/-9	Dh	15	Da2	8	32	18	0.6	45	From -16 to 90	Dark Grey/Green	
DF7-h-A2-FG-DG	36000	300	400	98	+10/-10	Dh	15	Da2	8	32	18	0.6	45	From -16 to 90	Dark Grey/Green	
DF8-h-A2-FG-DG	60000	400	500	103	+10/-10	Dh	15	Da2	8	39	22	0.6	45	From -16 to 90	Dark Grey/Green	

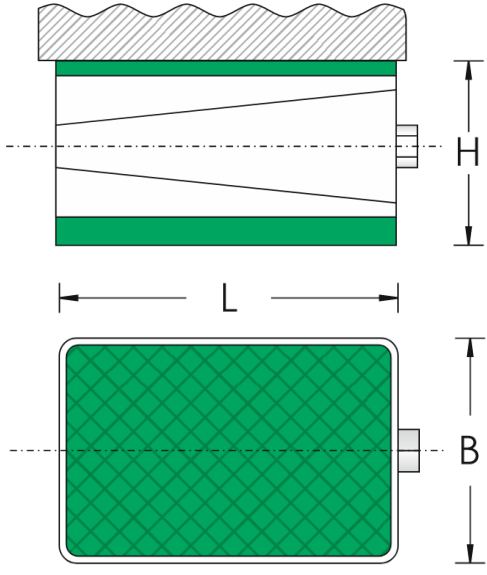






DF1

DF3

DF5


DF7

DF8

Model	Load Capacity Kg/pc	Length (L) mm	Width (B) mm	Height (H) at mean position (mm)	Adjustment Range (mm)	Bottom pad Type	Bottom pad Thickness (mm)	Top pad Type	Top pad Thickness (mm)	SW1 (mm)	SW2 (mm)	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (° C)	Color	Applications
DF1-a1-A1-FG-DG	1030	105	55	41	+4/-4	Da1	2	Da1	2	16	8	0.8	70	From -16 to 90	Dark Grey/Green	
DF2-a1-A1-FG-DG	2000	150	75	44	+5/-5	Da1	2	Da1	2	19	10	0.8	70	From -16 to 90	Dark Grey/Green	
DF3-a1-A1-FG-DG	3600	200	100	51	+5/-5	Da1	2	Da1	2	22	12	0.8	70	From -16 to 90	Dark Grey/Green	
DF4-a1-A1-FG-DG	7200	200	200	54	+6/-6	Da1	2	Da1	2	22	12	0.8	70	From -16 to 90	Dark Grey/Green	
DF5-a1-A1-FG-DG	9000	200	250	74	+9/-9	Da1	2	Da1	2	27	14	0.8	70	From -16 to 90	Dark Grey/Green	
DF6-a1-A1-FG-DG	14400	250	320	79	+9/-9	Da1	2	Da1	2	32	18	0.8	70	From -16 to 90	Dark Grey/Green	
DF7-a1-A1-FG-DG	21600	300	400	79	+10/-10	Da1	2	Da1	2	32	18	0.8	70	From -16 to 90	Dark Grey/Green	
DF8-a1-A1-FG-DG	36000	400	500	84	+10/-10	Da1	2	Da1	2	39	22	0.8	70	From -16 to 90	Dark Grey/Green	



Model	Load Capacity Kg/pc	Length (L) mm	Width (B) mm	Height (H) at mean position (mm)	Adjustment Range (mm)	Bottom pad Type	Bottom pad Thickness (mm)	Top pad Type	Top pad Thickness (mm)	SW1 (mm)	SW2 (mm)	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (° C)	Color	Applications
DF1-a2-A2-FG-DG	570	105	55	53	+4/-4	Da2	8	Da2	8	16	8	0.9	45	From -16 to 90	Dark Grey/Green	
DF2-a2-A2-FG-DG	1120	150	75	56	+5/-5	Da2	8	Da2	8	19	10	0.9	45	From -16 to 90	Dark Grey/Green	
DF3-a2-A2-FG-DG	2000	200	100	63	+5/-5	Da2	8	Da2	8	22	12	0.9	45	From -16 to 90	Dark Grey/Green	
DF4-a2-A2-FG-DG	4000	200	200	66	+6/-6	Da2	8	Da2	8	22	12	0.9	45	From -16 to 90	Dark Grey/Green	
DF5-a2-A2-FG-DG	5000	200	250	86	+9/-9	Da2	8	Da2	8	27	14	0.9	45	From -16 to 90	Dark Grey/Green	
DF6-a2-A2-FG-DG	8000	250	320	91	+9/-9	Da2	8	Da2	8	32	18	0.9	45	From -16 to 90	Dark Grey/Green	
DF7-a2-A2-FG-DG	12000	300	400	91	+10/-10	Da2	8	Da2	8	32	18	0.9	45	From -16 to 90	Dark Grey/Green	
DF8-a2-A2-FG-DG	20000	400	500	96	+10/-10	Da2	8	Da2	8	39	22	0.9	45	From -16 to 90	Dark Grey/Green	

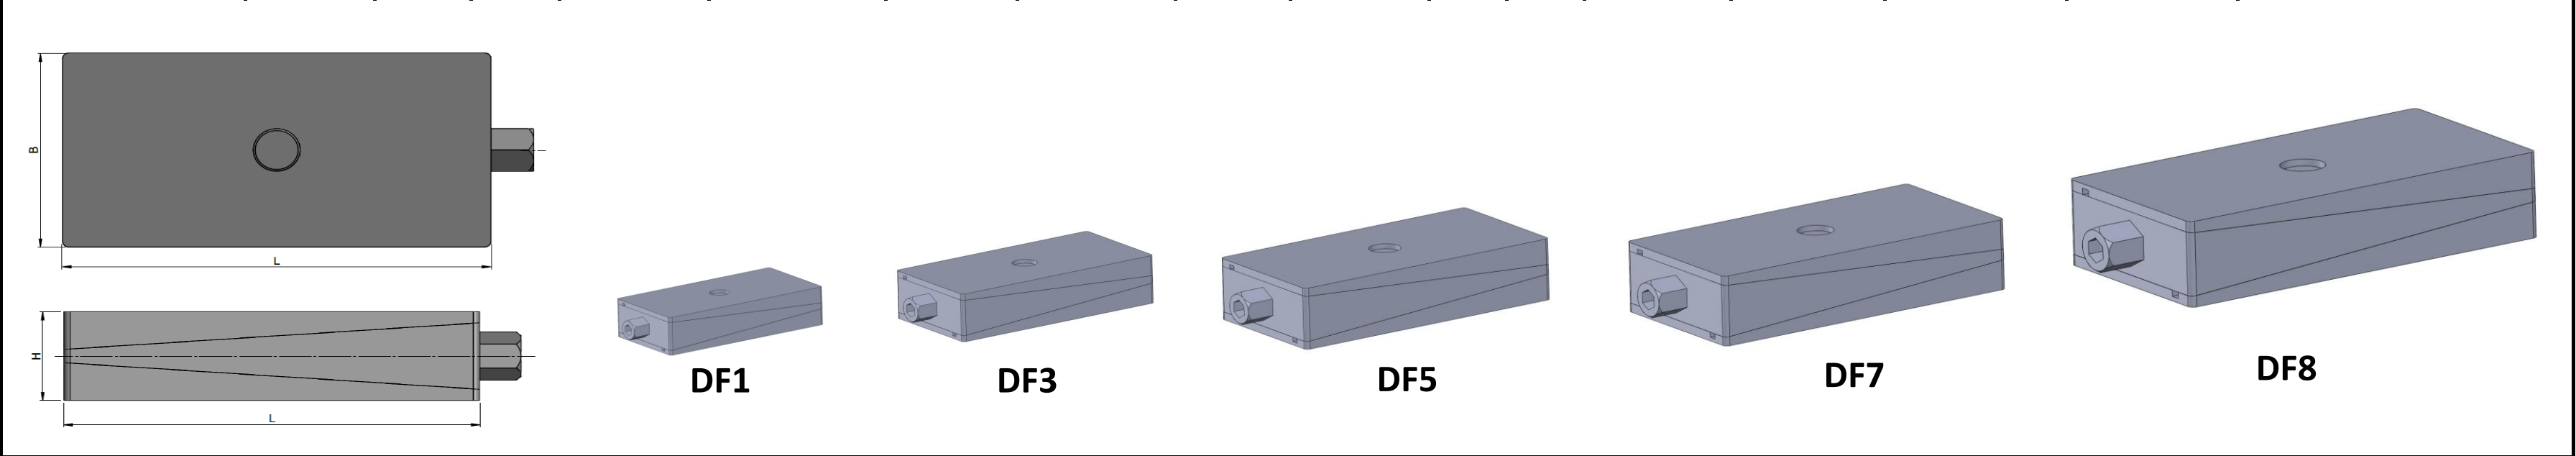

Model	Load Capacity Kg/pc	Length (L) mm	Width (B) mm	Height (H) at mean position (mm)	Adjustment Range (mm)	Bottom pad Type	Bottom pad Thickness (mm)	Top pad Type	Top pad Thickness (mm)	SW1 (mm)	SW2 (mm)	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (° C)	Color	Applications
DF1-FG-DG	1200	105	55	37	+4/-4	X	X	X	X	16	8	X	X	From -16 to 90	Dark Grey/Green	
DF2-FG-DG	3000	150	75	40	+5/-5	X	X	X	X	19	10	X	X	From -16 to 90	Dark Grey/Green	
DF3-FG-DG	5000	200	100	47	+5/-5	X	X	X	X	22	12	X	X	From -16 to 90	Dark Grey/Green	
DF4-FG-DG	10400	200	200	50	+6/-6	X	X	X	X	22	12	X	X	From -16 to 90	Dark Grey/Green	
DF5-FG-DG	13000	200	250	70	+9/-9	X	X	X	X	27	14	X	X	From -16 to 90	Dark Grey/Green	
DF6-FG-DG	20000	250	320	75	+9/-9	X	X	X	X	32	18	X	X	From -16 to 90	Dark Grey/Green	
DF7-FG-DG	30000	300	400	75	+10/-10	X	X	X	X	32	18	X	X	From -16 to 90	Dark Grey/Green	
DF8-FG-DG	40000	400	500	80	+10/-10	X	X	X	X	39	22	X	X	From -16 to 90	Dark Grey/Green	