
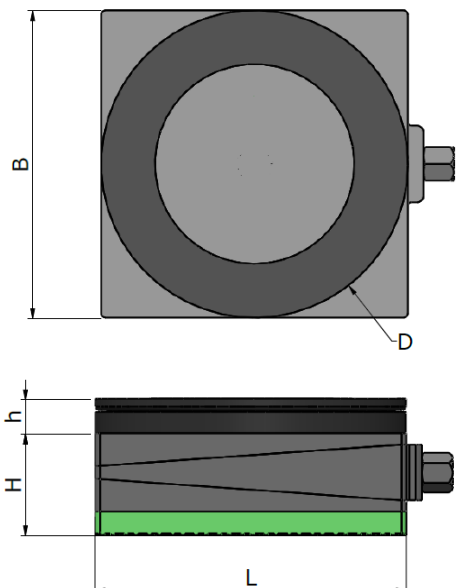
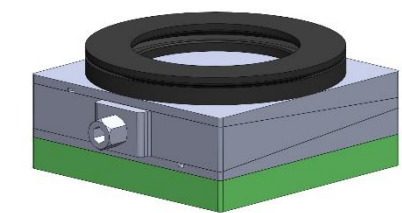
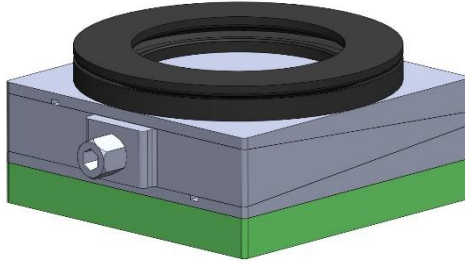
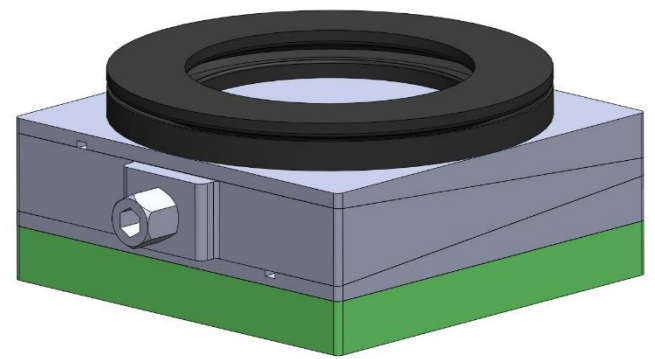
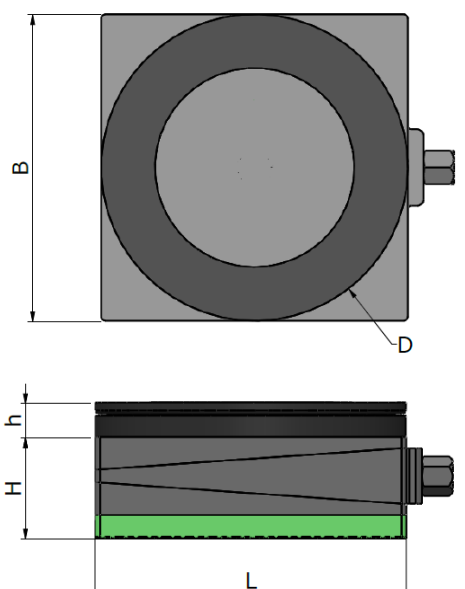
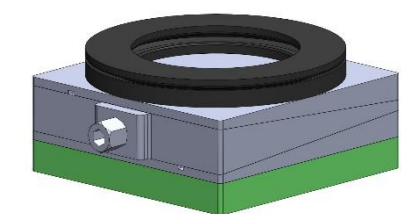
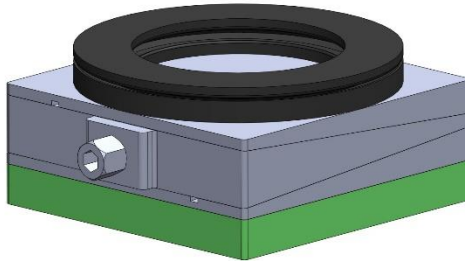


<																
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--


DFSP5-m-FG-DG	8000	250	320	90	28	250	+9/-9	Dm	15	32	18	0.7	30	From -16 to 90	Dark Grey/Green	machines, turning centres, transfer lines etc.
DFSP6-m-FG-DG	8500	300	400	90	32	300	+10/-10	Dm	15	32	18	0.7	30	From -16 to 90	Dark Grey/Green	


Model	Load Capacity Kg/pc	Length (L) mm	Width (B) mm	Height (H) at mean position (mm)	h (mm)	D (mm)	Adjst. Range with Anchor Nut (mm)	Bottom pad Type	Bottom pad Thickness (mm)	SW1 (mm)	SW2 (mm)	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (°C)	Color	Applications
DFSP1-i-FG-DG	1800	115	115	69	19	110	+4/-4	Di	25	19	10	0.8	7	From -16 to 90	Dark Grey/Green	Applications: Power Presses, Stamping Machines, Shearing Machines, Punching Machines.
DFSP2-i-FG-DG	2900	150	150	75	20	150	+5/-5	Di	25	22	12	0.8	7	From -16 to 90	Dark Grey/Green	
DFSP3-i-FG-DG	5200	200	200	75	22	200	+6/-6	Di	25	22	12	0.8	7	From -16 to 90	Dark Grey/Green	
DFSP4-i-FG-DG	6500	200	250	95	22	200	+9/-9	Di	25	27	14	0.8	7	From -16 to 90	Dark Grey/Green	
DFSP5-i-FG-DG	10000	250	320	100	28	250	+9/-9	Di	25	32	18	0.8	7	From -16 to 90	Dark Grey/Green	
DFSP6-i-FG-DG	15000	300	400	100	32	300	+10/-10	Di	25	32	18	0.8	7	From -16 to 90	Dark Grey/Green	

Model	Load Capacity Kg/pc	Length (L) mm	Width (B) mm	Height (H) at mean position (mm)	h (mm)	D (mm)	Adjst. Range with Anchor Nut (mm)	Bottom pad Type	Bottom pad Thickness (mm)	SW1 (mm)	SW2 (mm)	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (°C)	Color	Applications
DFSP1-p1-FG-DG	530	115	115	59	19	110	+4/-4	Dp1	15	19	10	0.8	7	From -16 to 90	Dark Grey/Green	Applications: Passive vibration control of measuring & Testing Machines, Grinders etc.
DFSP2-p1-FG-DG	900	150	150	65	20	150	+5/-5	Dp1	15	22	12	0.8	7	From -16 to 90	Dark Grey/Green	
DFSP3-p1-FG-DG	1600	200	200	65	22	200	+6/-6	Dp1	15	22	12	0.8	7	From -16 to 90	Dark Grey/Green	
DFSP4-p1-FG-DG	2000	200	250	85	22	200	+9/-9	Dp1	15	27	14	0.8	7	From -16 to 90	Dark Grey/Green	
DFSP5-p1-FG-DG	3200	250	320	90	28	250	+9/-9	Dp1	15	32	18	0.8	7	From -16 to 90	Dark Grey/Green	
DFSP6-p1-FG-DG	4800	300	400	90	32	300	+10/-10	Dp1	15	32	18	0.8	7	From -16 to 90	Dark Grey/Green	
DFSP1-p2-FG-DG	660	115	115	64	19	110	+4/-4	Dp2	20	19	10	0.8	12	From -16 to 90	Dark Grey/Green	Applications : Measuring & Testing Machines, Surface Plates, Hardness Testers, Microscopes, EDM Machines, Profile Projectors etc.
DFSP2-p2-FG-DG	1125	150	150	70	20	150	+5/-5	Dp2	20	22	12	0.8	12	From -16 to 90	Dark Grey/Green	
DFSP3-p2-FG-DG	2000	200	200	70	22	200	+6/-6	Dp2	20	22	12	0.8	12	From -16 to 90	Dark Grey/Green	
DFSP4-p2-FG-DG	2500	200	250	90	22	200	+9/-9	Dp2	20	27	14	0.8	12	From -16 to 90	Dark Grey/Green	
DFSP5-p2-FG-DG	4000	250	320	95	28	250	+9/-9	Dp2	20	32	18	0.8	12	From -16 to 90	Dark Grey/Green	
DFSP6-p2-FG-DG	6000	300	400	95	32	300	+10/-10	Dp2	20	32	18	0.8	12	From -16 to 90	Dark Grey/Green	
DFSP1-p3-FG-DG	800	115	115	68	19	110	+4/-4	Dp3	24	19	10	0.8	7	From -16 to 90	Dark Grey/Green	Applications : Measuring & Testing Machines, Surface Plates, Hardness Testers, Microscopes, EDM Machines, Profile Projectors etc.
DFSP2-p3-FG-DG	1350	150	150	74	20	150	+5/-5	Dp3	24	22	12	0.8	7	From -16 to 90	Dark Grey/Green	
DFSP3-p3-FG-DG	2400	200	200	74	22	200	+6/-6	Dp3	24	22	12	0.8	7	From -16 to 90	Dark Grey/Green	
DFSP4-p3-FG-DG	3000	200	250	94	22	200	+9/-9	Dp3	24	27	14	0.8	7	From -16 to 90	Dark Grey/Green	
DFSP5-p3-FG-DG	4800	250	320	99	28	250	+9/-9	Dp3	24	32	18	0.8	7	From -16 to 90	Dark Grey/Green	
DFSP6-p3-FG-DG	7200	300	400	99	32	300	+10/-10	Dp3	24	32	18	0.8	7	From -16 to 90	Dark Grey/Green	


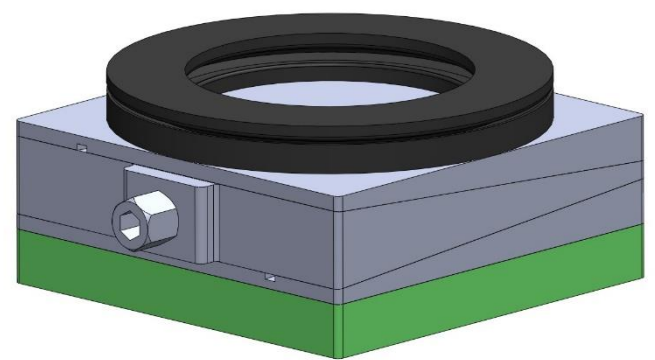


Model	Load Capacity Kg/pc	Length (L) mm	Width (B) mm	Height (H) at mean position (mm)	h (mm)	D (mm)	Adjst. Range with Anchor Nut (mm)	Bottom pad Type	Bottom pad Thickness (mm)	SW1 (mm)	SW2 (mm)	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (°C)	Color	Applications
DFSP1-s1-FG-DG	660	115	115	64	19	110	+4/-4	Ds1	20	19	10	0.8	15	From -16 to 90	Dark Grey/Green	Applications : Active & Passive vibration isolation of metrology and production machines.
DFSP2-s1-FG-DG	1120	150	150	70	20	150	+5/-5	Ds1	20	22	12	0.8	15	From -16 to 90	Dark Grey/Green	
DFSP3-s1-FG-DG	2000	200	200	70	22	200	+6/-6	Ds1	20	22	12	0.8	15	From -16 to 90	Dark Grey/Green	
DFSP4-s1-FG-DG	2500	200	250	90	22	200	+9/-9	Ds1	20	27	14	0.8	15	From -16 to 90	Dark Grey/Green	
DFSP5-s1-FG-DG	4000	250	320	95	28	250	+9/-9	Ds1	20	32	18	0.8	15	From -16 to 90	Dark Grey/Green	
DFSP6-s1-FG-DG	6000	300	400	95	32	300	+10/-10	Ds1	20	32	18	0.8	15	From -16 to 90	Dark Grey/Green	
DFSP1-s2-FG-DG	950	115	115	69	19	110	+4/-4	Ds2	25	19	10	0.8	8	From -16 to 90	Dark Grey/Green	Applications : Medium Presses, Stamping machines, also well suited for high speed rotating machines on upper floors.
DFSP2-s2-FG-DG	1600	150	150	75	20	150	+5/-5	Ds2	25	22	12	0.8	8	From -16 to 90	Dark Grey/Green	
DFSP3-s2-FG-DG	2800	200	200	75	22	200	+6/-6	Ds2	25	22	12	0.8	8	From -16 to 90	Dark Grey/Green	
DFSP4-s2-FG-DG	3500	200	250	95	22	200	+9/-9	Ds2	25	27	14	0.8	8	From -16 to 90	Dark Grey/Green	
DFSP5-s2-FG-DG	5500	250	320	100	28	250	+9/-9	Ds2	25	32	18	0.8	8	From -16 to 90	Dark Grey/Green	
DFSP6-s2-FG-DG	8500	300	400	100	32	300	+10/-10	Ds2	25	32	18	0.8	8	From -16 to 90	Dark Grey/Green	

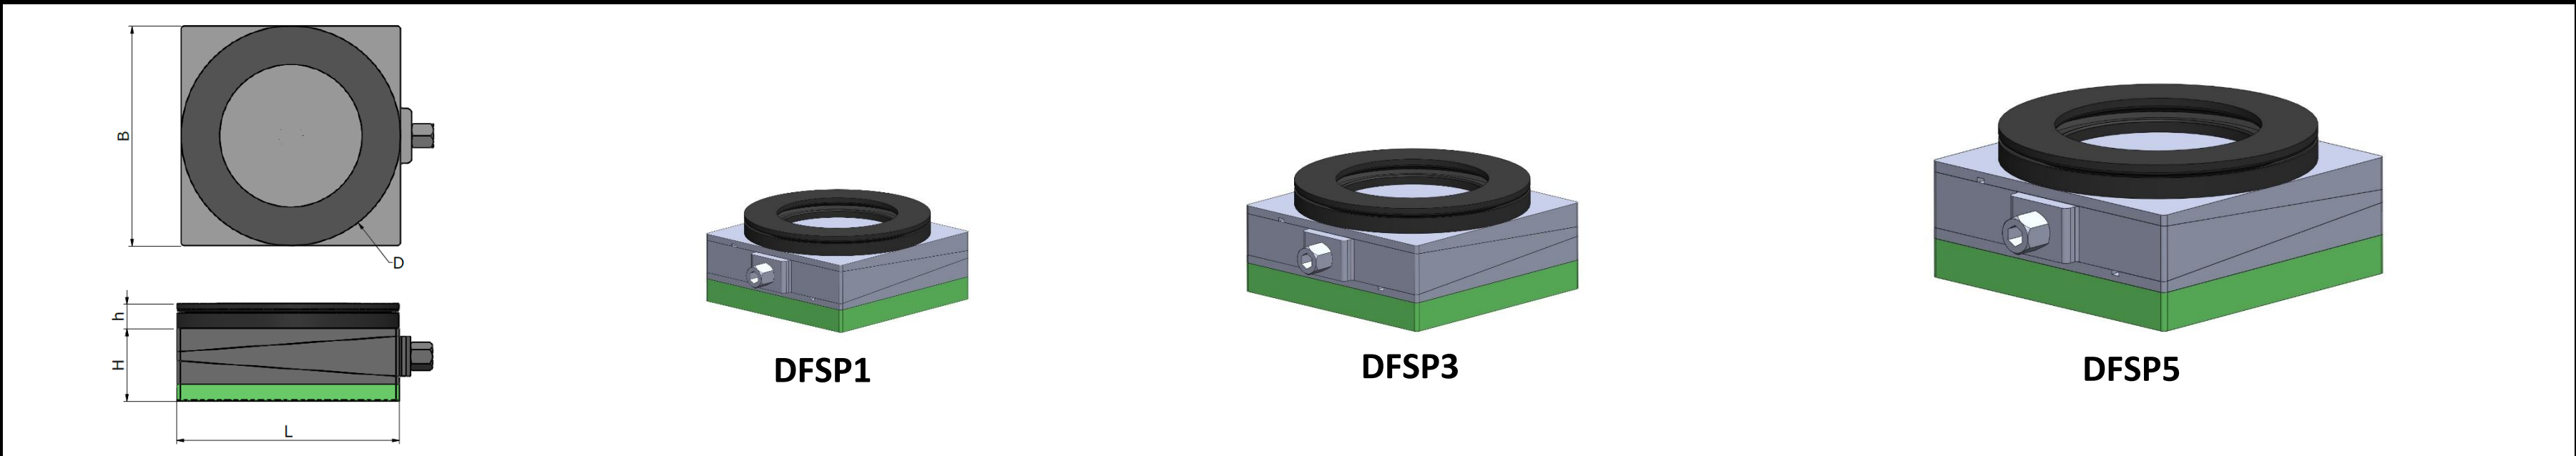


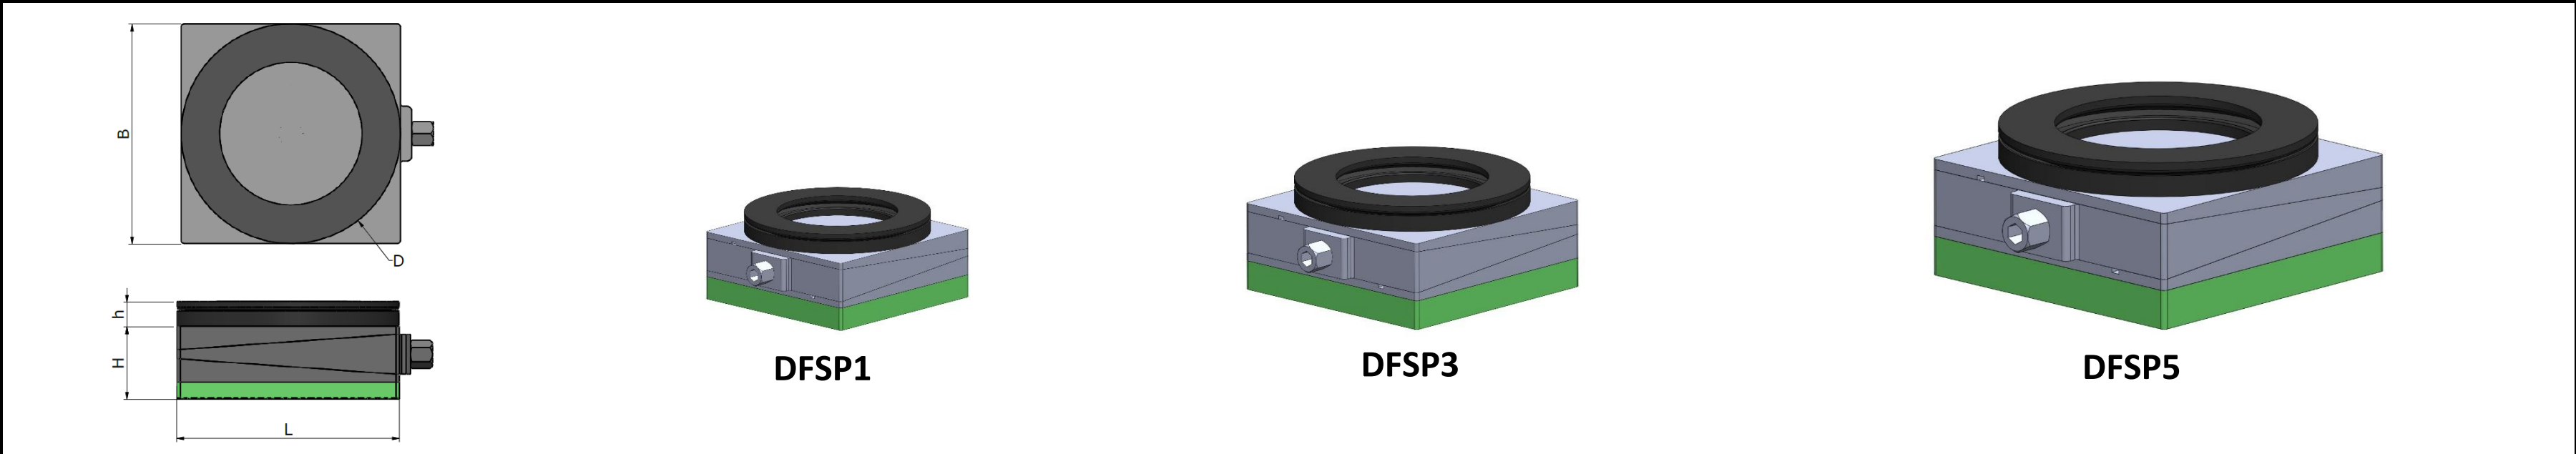Model	Load Capacity Kg/pc	Length (L) mm	Width (B) mm	Height (H) at mean position (mm)	h (mm)	D (mm)	Adjst. Range with Anchor Nut (mm)	Bottom pad Type	Bottom pad Thickness (mm)	SW1 (mm)	SW2 (mm)	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (°C)	Color	Applications
DFSP1-hs1-FG-DG	2600	115	115	109	19	110	+4/-4	Dhs1	65	19	10	0.8	6	From -16 to 90	Dark Grey/Green	Applications : Forging Hammers, Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses etc.
DFSP2-hs1-FG-DG	4500	150	150	115	20	150	+5/-5	Dhs1	65	22	12	0.8	6	From -16 to 90	Dark Grey/Green	
DFSP3-hs1-FG-DG	8000	200	200	115	22	200	+6/-6	Dhs1	65	22	12	0.8	6	From -16 to 90	Dark Grey/Green	
DFSP4-hs1-FG-DG	10000	200	250	135	22	200	+9/-9	Dhs1	65	27	14	0.8	6	From -16 to 90	Dark Grey/Green	
DFSP5-hs1-FG-DG	16000	250	320	140	28	250	+9/-9	Dhs1	65	32	18	0.8	6	From -16 to 90	Dark Grey/Green	
DFSP6-hs1-FG-DG	24000	300	400	140	32	300	+10/-10	Dhs1	65	32	18	0.8	6	From -16 to 90	Dark Grey/Green	
DFSP1-hs2-FG-DG	1060	115	115	109	19	110	+4/-4	Dhs2	65	19	10	0.8	4	From -16 to 90	Dark Grey/Green	Applications : Forging Hammers, Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses, crushers etc.
DFSP2-hs2-FG-DG	1800	150	150	115	20	150	+5/-5	Dhs2	65	22	12	0.8	4	From -16 to 90	Dark Grey/Green	
DFSP3-hs2-FG-DG	3200	200	200	115	22	200	+6/-6	Dhs2	65	22	12	0.8	4	From -16 to 90	Dark Grey/Green	
DFSP4-hs2-FG-DG	4000	200	250	135	22	200	+9/-9	Dhs2	65	27	14	0.8	4	From -16 to 90	Dark Grey/Green	
DFSP5-hs2-FG-DG	6400	250	320	140	28	250	+9/-9	Dhs2	65	32	18	0.8	4	From -16 to 90	Dark Grey/Green	
DFSP6-hs2-FG-DG	9600	300	400	140	32	300	+10/-10	Dhs2	65	32	18	0.8	4	From -16 to 90	Dark Grey/Green	
DFSP1-hs3-FG-DG	3700	115	115	94	19	110	+4/-4	Dhs3	50	19	10	0.8	7	From -16 to 90	Dark Grey/Green	Applications : Forging Hammers, Heavy Gen Sets
DFSP2-hs3-FG-DG	6300	150	150	100	20	150	+5/-5	Dhs3	50	22	12	0.8	7	From -16 to 90	Dark Grey/Green	


DFSP3-hs3-FG-DG	11200	200	200	100	22	200	+6/-6	Dhs3	50	22	12	0.8	7	From -16 to 90	Dark Grey/Green	Applications : Forging hammers, Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses etc.
DFSP4-hs3-FG-DG	14000	200	250	120	22	200	+9/-9	Dhs3	50	27	14	0.8	7	From -16 to 90	Dark Grey/Green	
DFSP5-hs3-FG-DG	22400	250	320	125	28	250	+9/-9	Dhs3	50	32	18	0.8	7	From -16 to 90	Dark Grey/Green	
DFSP6-hs3-FG-DG	33600	300	400	125	32	300	+10/-10	Dhs3	50	32	18	0.8	7	From -16 to 90	Dark Grey/Green	
DFSP1-hs4-FG-DG	1600	115	115	94	19	110	+4/-4	Dhs4	50	19	10	0.8	5	From -16 to 90	Dark Grey/Green	Applications : Forging Hammers, Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses, crushers etc.
DFSP2-hs4-FG-DG	2700	150	150	100	20	150	+5/-5	Dhs4	50	22	12	0.8	5	From -16 to 90	Dark Grey/Green	
DFSP3-hs4-FG-DG	4800	200	200	100	22	200	+6/-6	Dhs4	50	22	12	0.8	5	From -16 to 90	Dark Grey/Green	
DFSP4-hs4-FG-DG	6000	200	250	120	22	200	+9/-9	Dhs4	50	27	14	0.8	5	From -16 to 90	Dark Grey/Green	
DFSP5-hs4-FG-DG	9600	250	320	125	28	250	+9/-9	Dhs4	50	32	18	0.8	5	From -16 to 90	Dark Grey/Green	Applications : Forging Hammers, Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses etc.
DFSP6-hs4-FG-DG	14400	300	400	125	32	300	+10/-10	Dhs4	50	32	18	0.8	5	From -16 to 90	Dark Grey/Green	
DFSP1-hs5-FG-DG	3700	115	115	124	19	110	+4/-4	Dhs5	80	19	10	0.8	5	From -16 to 90	Dark Grey/Green	
DFSP2-hs5-FG-DG	6300	150	150	130	20	150	+5/-5	Dhs5	80	22	12	0.8	5	From -16 to 90	Dark Grey/Green	
DFSP3-hs5-FG-DG	11200	200	200	130	22	200	+6/-6	Dhs5	80	22	12	0.8	5	From -16 to 90	Dark Grey/Green	
DFSP4-hs5-FG-DG	14000	200	250	150	22	200	+9/-9	Dhs5	80	27	14	0.8	5	From -16 to 90	Dark Grey/Green	
DFSP5-hs5-FG-DG	22400	250	320	155	28	250	+9/-9	Dhs5	80	32	18	0.8	5	From -16 to 90	Dark Grey/Green	
DFSP6-hs5-FG-DG	33600	300	400	155	32	300	+10/-10	Dhs5	80	32	18	0.8	5	From -16 to 90	Dark Grey/Green	

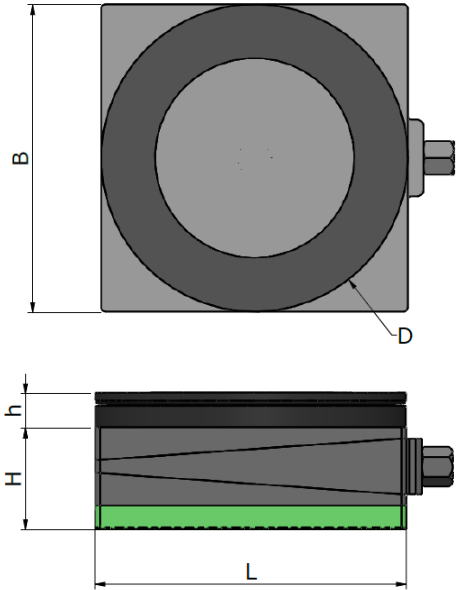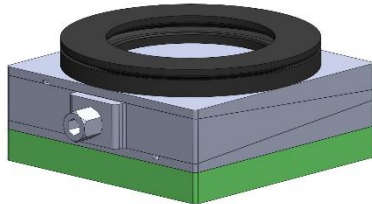DFSP1


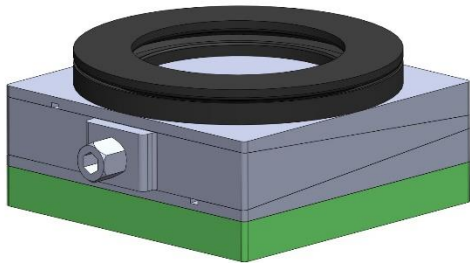


DFSP3

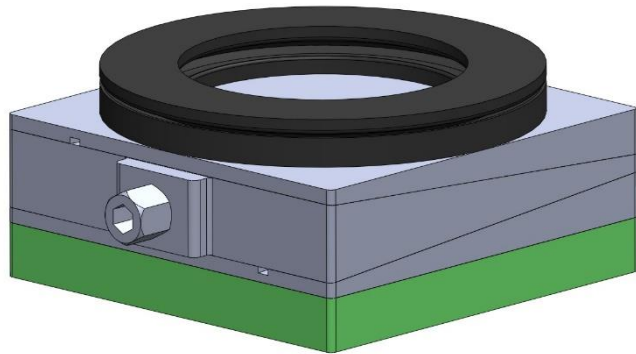


DFSP5


Model	Load Capacity Kg/pc	Length (L) mm	Width (B) mm	Height (H) at mean position (mm)	h (mm)	D (mm)	Adjst. Range with Anchor Nut (mm)	Bottom pad Type	Bottom pad Thickness (mm)	SW1 (mm)	SW2 (mm)	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (°C)	Color	Applications
DFSP1-h-FG-DG	3970	115	115	59	19	110	+4/-4	Dh	15	19	10	0.6	45	From -16 to 90	Dark Grey/Green	Applications : Very Heavy and long bed machines, long machining centres, planners etc.
DFSP2-h-FG-DG	6750	150	150	65	20	150	+5/-5	Dh	15	22	12	0.6	45	From -16 to 90	Dark Grey/Green	
DFSP3-h-FG-DG	12000	200	200	65	22	200	+6/-6	Dh	15	22	12	0.6	45	From -16 to 90	Dark Grey/Green	
DFSP4-h-FG-DG	15000	200	250	85	22	200	+9/-9	Dh	15	27	14	0.6	45	From -16 to 90	Dark Grey/Green	
DFSP5-h-FG-DG	24000	250	320	90	28	250	+9/-9	Dh	15	32	18	0.6	45	From -16 to 90	Dark Grey/Green	
DFSP6-h-FG-DG	36000	300	400	90	32	300	+10/-10	Dh	15	32	18	0.6	45	From -16 to 90	Dark Grey/Green	

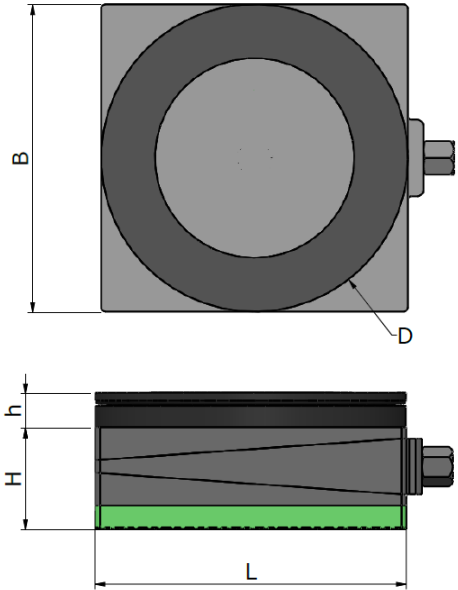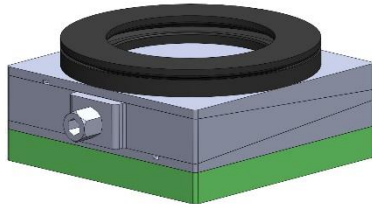DFSP1

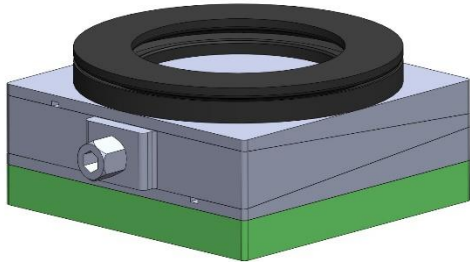



DFSP3

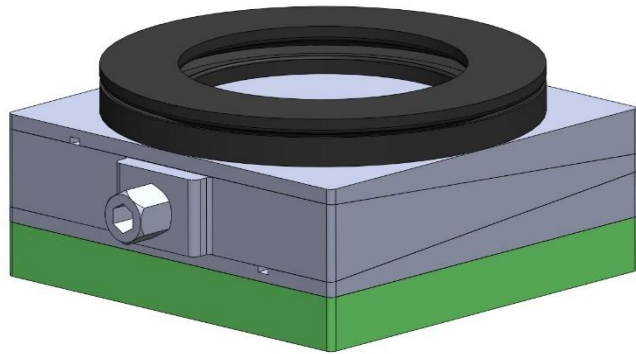


DFSP5

Model	Load Capacity Kg/pc	Length (L) mm	Width (B) mm	Height (H) at mean position (mm)	h (mm)	D (mm)	Adjst. Range with Anchor Nut (mm)	Bottom pad Type	Bottom pad Thickness (mm)	SW1 (mm)	SW2 (mm)	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (°C)	Color	Applications
DFSP1-a1-FG-DG	2380	115	115	46	19	110	+4/-4	Da1	2	19	10	0.8	70	From -16 to 90	Dark Grey/Green	
DFSP2-a1-FG-DG	4050	150	150	52	20	150	+5/-5	Da1	2	22	12	0.8	70	From -16 to 90	Dark Grey/Green	
DFSP3-a1-FG-DG	7200	200	200	52	22	200	+6/-6	Da1	2	22	12	0.8	70	From -16 to 90	Dark Grey/Green	
DFSP4-a1-FG-DG	9000	200	250	72	22	200	+9/-9	Da1	2	27	14	0.8	70	From -16 to 90	Dark Grey/Green	


DFSP5-a1-FG-DG	14400	250	320	77	28	250	+9/-9	Da1	2	32	18	0.8	70	From -16 to 90	Dark Grey/Green	
DFSP6-a1-FG-DG	21600	300	400	77	32	300	+10/-10	Da1	2	32	18	0.8	70	From -16 to 90	Dark Grey/Green	

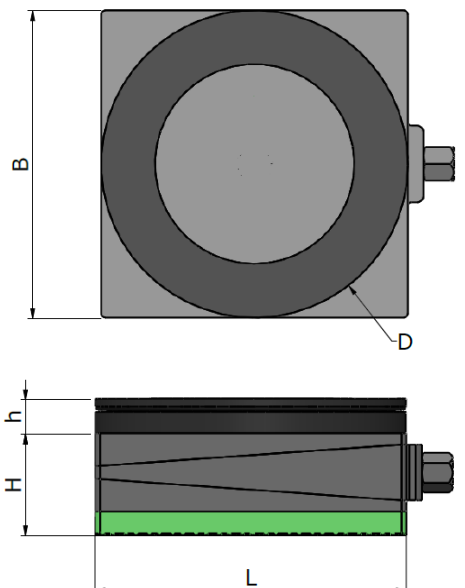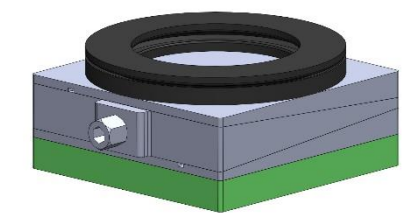DFSP1

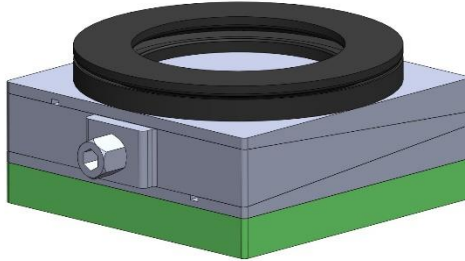


DFSP3

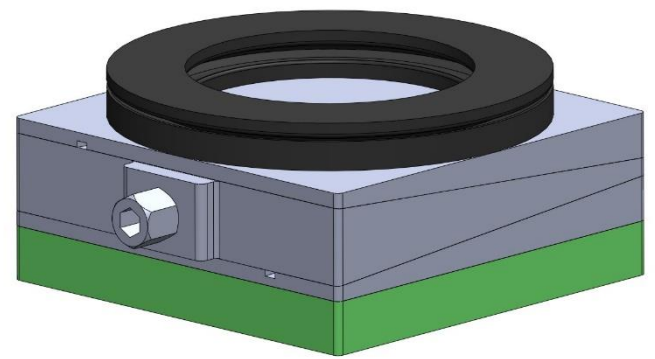

DFSP5


Model	Load Capacity Kg/pc	Length (L) mm	Width (B) mm	Height (H) at mean position (mm)	h (mm)	D (mm)	Adjst. Range with Anchor Nut (mm)	Bottom pad Type	Bottom pad Thickness (mm)	SW1 (mm)	SW2 (mm)	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (°C)	Color	Applications
DFSP1-a2-FG-DG	1320	115	115	52	19	110	+4/-4	Da2	8	19	10	0.9	45	From -16 to 90	Dark Grey/Green	
DFSP2-a2-FG-DG	2250	150	150	58	20	150	+5/-5	Da2	8	22	12	0.9	45	From -16 to 90	Dark Grey/Green	
DFSP3-a2-FG-DG	4000	200	200	58	22	200	+6/-6	Da2	8	22	12	0.9	45	From -16 to 90	Dark Grey/Green	
DFSP4-a2-FG-DG	5000	200	250	78	22	200	+9/-9	Da2	8	27	14	0.9	45	From -16 to 90	Dark Grey/Green	
DFSP5-a2-FG-DG	8000	250	320	83	28	250	+9/-9	Da2	8	32	18	0.9	45	From -16 to 90	Dark Grey/Green	
DFSP6-a2-FG-DG	12000	300	400	83	32	300	+10/-10	Da2	8	32	18	0.9	45	From -16 to 90	Dark Grey/Green	

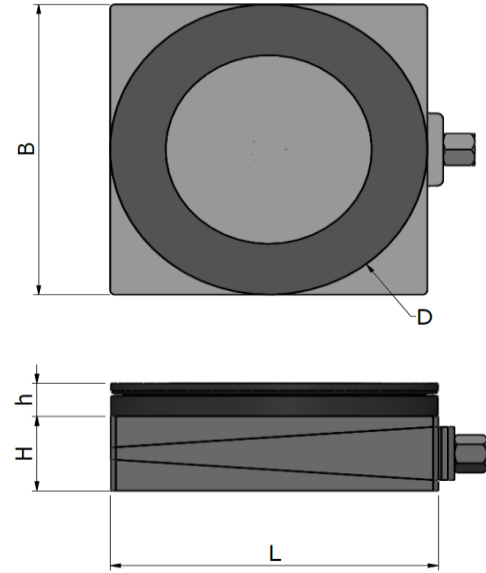


DFSP1



DFSP3

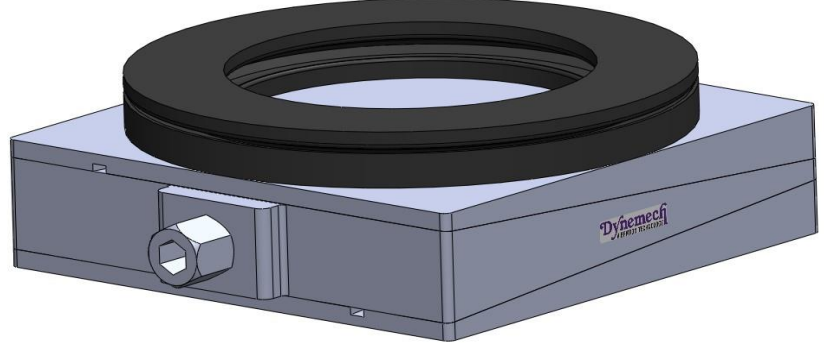

DFSP5

Model	Load Capacity Kg/pc	Length (L) mm	Width (B) mm	Height (H) at mean position (mm)	h (mm)	D (mm)	Adjst. Range with Anchor Nut (mm)	Bottom pad Type	Bottom pad Thickness (mm)	SW1 (mm)	SW2 (mm)	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (°C)	Color	Applications
DFSP1-FG-DG	3600	115	115	44	19	110	+4/-4	X	X	19	10	X	X	From -16 to 90	Dark Grey/Green	Applications : For levelling of all Precicion Machines.
DFSP2-FG-DG	5800	150	150	50	20	150	+5/-5	X	X	22	12	X	X	From -16 to 90	Dark Grey/Green	
DFSP3-FG-DG	10400	200	200	50	22	200	+6/-6	X	X	22	12	X	X	From -16 to 90	Dark Grey/Green	
DFSP4-FG-DG	13000	200	250	70	22	200	+9/-9	X	X	27	14	X	X	From -16 to 90	Dark Grey/Green	
DFSP5-FG-DG	20000	250	320	75	28	250	+9/-9	X	X	32	18	X	X	From -16 to 90	Dark Grey/Green	
DFSP6-FG-DG	30000	300	400	75	32	300	+10/-10	X	X	32	18	X	X	From -16 to 90	Dark Grey/Green	