



WEDGE MOUNTS

WEDGE MOUNTS, Series DTO (BOLT Thru)

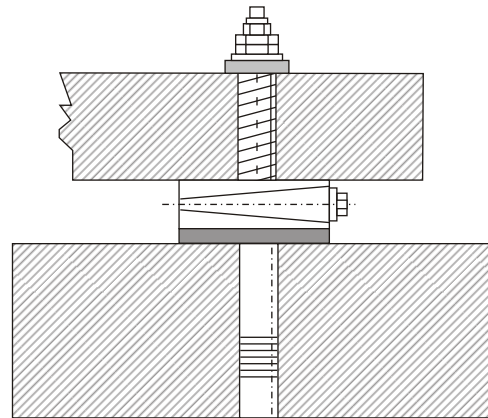

Series DTO

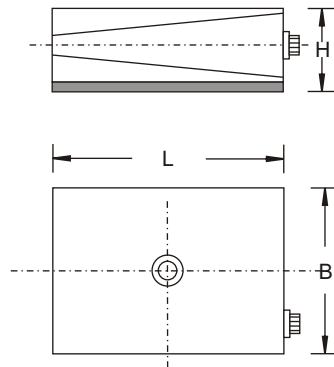

Dynemech Wedge Mounts, Series DTO is designed for machines which are top heavy or have eccentric motion or machines which must be anchored to the ground. Boring Machine, Drilling and Milling machines, Machining centres, Special purpose machines, Long lathes, Long planers, Power Presses etc.

Model	Load Kg/pc	Length (L) mm	Width (B) mm	Height* (H) mm	Bore (mm)	Adj. range (mm)
DT01-u	1100	115	115	59	22	8
DT02-u	1800	150	150	64	22	10
DT03-u	3200	200	200	63	28	12
DT04-u	4000	200	250	85	28	18
DT05-u	6400	250	320	90	28	18
DT06-u	9600	300	400	90	30	20
DT01-m	1400	115	115	59	22	8
DT02-m	2200	150	150	64	22	10
DT03-m	4000	200	200	63	28	12
DT04-m	5000	200	250	85	28	18
DT05-m	8000	250	320	90	28	18
DT06-m	12000	300	400	90	30	20
DT01-i	1800	115	115	59	22	8
DT02-i	2900	150	150	64	22	10
DT03-i	5200	200	200	63	28	12
DT04-i	6500	200	250	85	28	18
DT05-i	10000	250	320	90	28	18
DT06-i	15000	300	400	90	30	20
DT01-s2	950	115	115	59	22	8
DT02-s2	1600	150	150	64	22	10
DT03-s2	2800	200	200	63	28	12
DT04-s2	3500	200	250	85	28	18
DT05-s2	5500	250	320	90	28	18
DT06-s2	8500	300	400	90	30	20

*Height (H) at mean position

DYNEMECH INSULATING DISCS

FOR ANCHORING APPLICATIONS



BOLT SIZE	OD Ø	ID Ø	THICKNESS (mm)
M16	40	17	25
M20	52	21	25
M30	75	31	25