


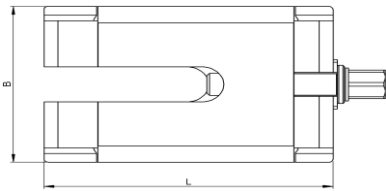


The DFL series mounts are made from a high grade casting body. Large supporting surface and high levelling adjustment is available. The slot in the middle allows placement of these mounts after the grouting bolts are fixed in the foundation. Suitable for VTL, long bedded CNC machines, large boring machines, plano miller etc.




**DYNEMECH PRECISION LEVELLING MOUNT DFL1-S1**



S. No.	Model	Load Capacity Kg/pc	Length L mm	Width B mm	Height H mm	Max. Torque value (N.m)	Adjustment Range mm
1	DFL1-S1-SP1	8000	207	142	86	454	13


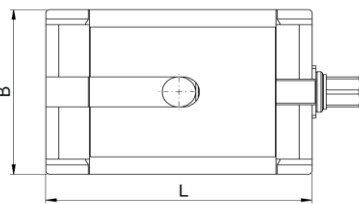


S. No.	Model	Load Capacity Kg/pc	Length L mm	Width B mm	Height H mm	Adjustment Range mm
1	DFL1-S1-SP1-300	8000	207	142	300	13

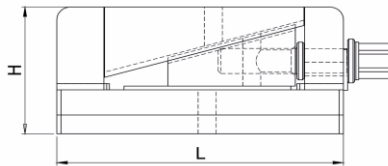



S. No.	Model	Load Capacity Kg/pc	Length L mm	Width B mm	Height H mm	Adjustment Range mm
1	DFL1-S1-SP1-H	12000	207	142	101	13

**DYNEMECH PRECISION LEVELLING MOUNT DFL2-S1**

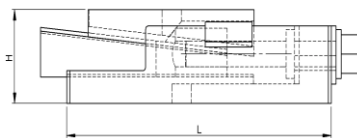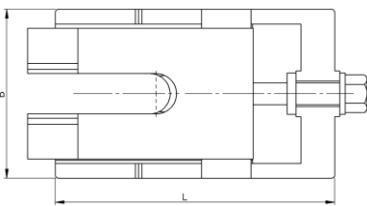



S. No.	Model	Load Capacity Kg/pc	Length L mm	Width B mm	Height H mm	Max. Torque value (N.m)	Adjustment Range mm
1	DFL2-S1	4000	255	155	73	216	5

**DYNEMECH PRECISION LEVELLING MOUNT DFL1-S3**

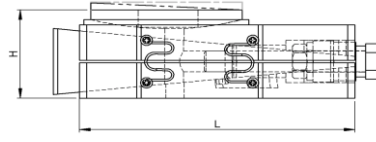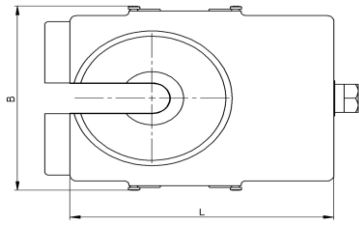




S. No.	Model	Load Capacity Kg/pc	Length L mm	Width B mm	Height H mm	Max. Torque value (N.m)	Adjustment Range mm
1	DFL1-S3	12200	188	140	68.5	603	6

**DYNEMECH PRECISION LEVELLING MOUNT DFL4**

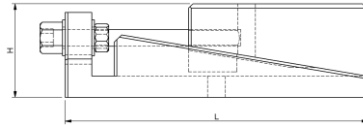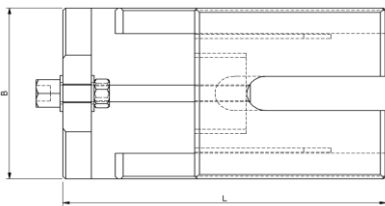

S. No.	Model	Load Capacity Kg/pc	Length L mm	Width B mm	Height H mm	Max. Torque value (N.m)	Adjustment Range mm
1	DFL4	17000	340	200	113	1090	15

**DYNEMECH PRECISION LEVELLING MOUNT DFL3-S2**

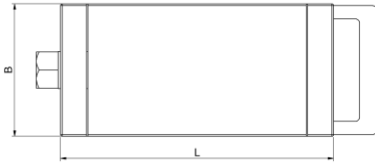

S. No.	Model	Load Capacity Kg/pc	Length L mm	Width B mm	Height H mm	Max. Torque value (N.m)	Adjustment Range mm
1	DFL3-S2	20000	315	150	140	1748	8